



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

Countertop Glass Door Merchandisers

Standard Features

- Black exterior cabinet with black door frame and white interior
- Environmentally friendly R600a refrigerant
- Foamed-in-place high density polyurethane insulation
- Double pane glass door with recessed door handle
- Door lock standard
- Electronic Temperature Controller
- Pre-installed removable PVC coated wire shelves standard
- Certified for packaged foods and bottled beverages
- Maintains temperatures between 35°F – 38°F
- Magnetic door gasket standard for positive door seal
- LED interior lighting
- Leveling legs
- 5' cord with NEMA 5-15 plug standard

Note: CTD-3T and CTD-3ST models feature a 1-year parts and labor warranty and do not qualify for the 3-year parts and labor warranty.

For the best results of food preservation we recommend setting your refrigerator between 35°F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



3 YEAR PARTS AND LABOR WARRANTY
5 YEAR COMPRESSOR PART WARRANTY

Note: CTD-3T and CTD-3ST models feature a 1-year parts and labor warranty and do not qualify for the 3-year parts and labor warranty.

MODELS:

CTD-3T / CTD-3ST / CTD-5T / CTD-7T



CTD-3T



CTD-3ST



CTD-5T



CTD-7T



REV. 08/26



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com


California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

SPECIFICATIONS


Models	Door	Capacity (Cu.Ft.)	Shelves	Amps(A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Interior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
CTD-3T	1	2.4	2	0.65	115/60/1	1/10	R600a	17 ^{1/4} ×19 ^{3/4} ×27 ^{1/2}	14 ^{3/8} ×15×23	52	57
CTD-3ST	1	2.4	2	1.0	115/60/1	1/8	R600a	18 ^{1/8} ×18 ^{1/2} ×33	14 ^{1/2} ×13×22	64	70
CTD-5T	1	4.6	3	1.5	115/60/1	1/8	R600a	21 ^{1/4} ×22×33 ^{3/4}	18×17×29	88	95
CTD-7T	1	7.0	3	1.3	115/60/1	1/8	R600a	21 ^{1/2} ×24×38	20 ^{1/4} ×18 ^{1/4} ×31 ^{5/8}	101	113

PLAN VIEW


CTD-3T

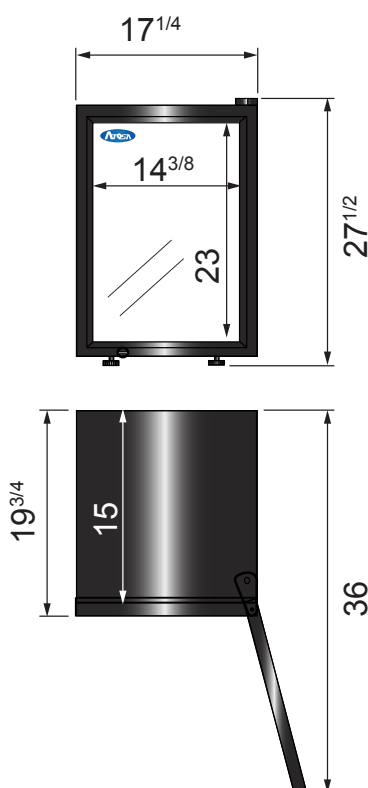

CTD-3ST

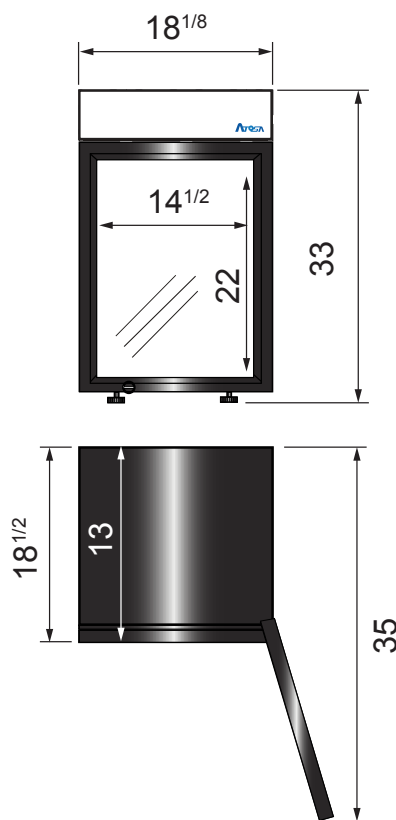


CTD-5T

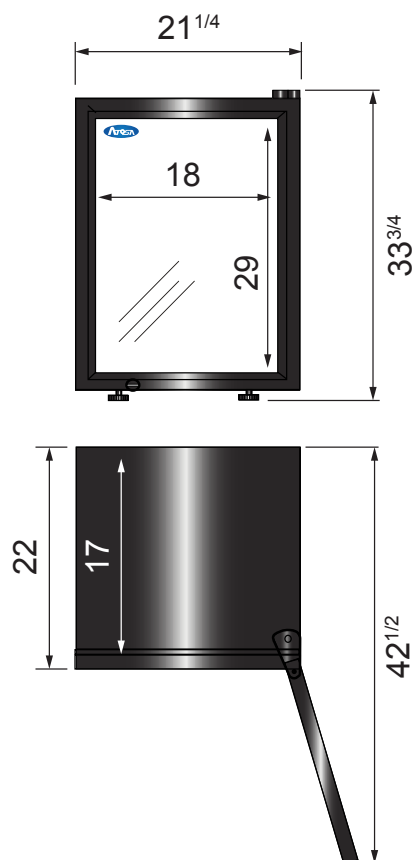

Door lock

LED lights

Epoxy shelves

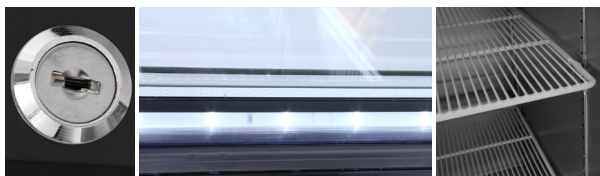

NEMA 5-15P



NEMA
15A/125V