

# REACH IN FREEZER D28EF Bottom Mounted / Solid Door



## **1** TECHNICAL SPECIFICATIONS

Voltage/Frequency
Refrigerant
R290
Type of Defrost
Interial Material
Exterior Material
Temperature Range °F
Compressor Power (HP)
Nema Config. NEMA5-15P



## PRODUCT FEATURES

The compressor is mounted in the bottom for better heat evaporation.

Front Slide Out Platform

- Front sliding out compressor and condenser for easy maintenance and service.
- BB Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 33 ~ 41° degrees Fahrenheit.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Adjustable front locking casters.
- Hinged glass doors, tempered glass, UV blocking.
- Lifetime warranty on hinges.
- Equipped with Locking Doors.



HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey **(**) 1-800-931-8628


info@dukersusa.com

www.DukersUSA.com


## **DETAILS & SPECIFICATIONS**

## D28EF

Front View

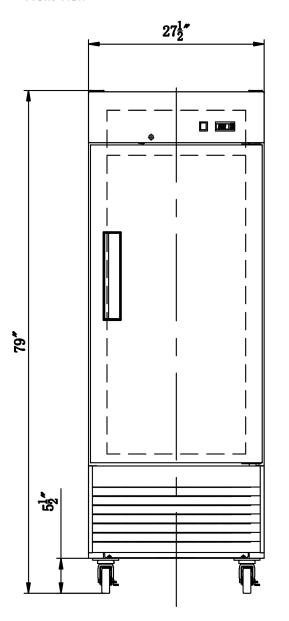

Side View

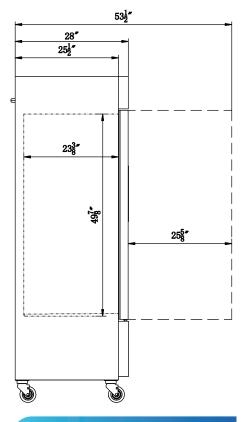

#### **MODEL D28EF**

Rated Voltage 110V 60Hz Rated Frequency **Total Capacity** 15.94 cu ft C-Pentane **Insulation Blowing Gas** Refrigerant R290

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)		T	40HQ CONTAINER CERT.
D28EF	27 1/2 x 28 x 79	29 1/8 x 30 x 83	220 lbs	3	48













