



Front Slide Out Platform













REACH IN REFRIGERATOR D47ER Bottom Mounted / 2-Solid Door



TECHNICAL SPECIFICATIONS

Voltage/Frequency	110V/60Hz
Refrigerant	R290
Type of Defrost	Automatic
Interior Material	Stainless Steel
Exterior Material	Stainless Steel
Temperature Range °F	33 ~ 41°F
Compressor Power (HP)	1/2-
Nema Config.	NEMA5-15P

PRODUCT FEATURES

-  The compressor is mounted in the bottom for better heat evaporation.
-  Front sliding out compressor and condenser for easy maintenance and service.
-  Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
-  Temperatures in the cabinet range from 33 ~ 41° degrees Fahrenheit.
-  R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
-  Epoxy coated wire shelves.
-  Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
-  High quality coated stainless adjustable shelves prevent peel and rust.
-  Adjustable front locking casters.
-  Hinged glass doors, tempered glass, UV blocking.
-  Lifetime warranty on hinges.
-  Equipped with Locking Doors.

HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

 1-800-931-8628


 info@dukersusa.com

www.DukersUSA.com


DETAILS & SPECIFICATIONS

D47ER

Front View

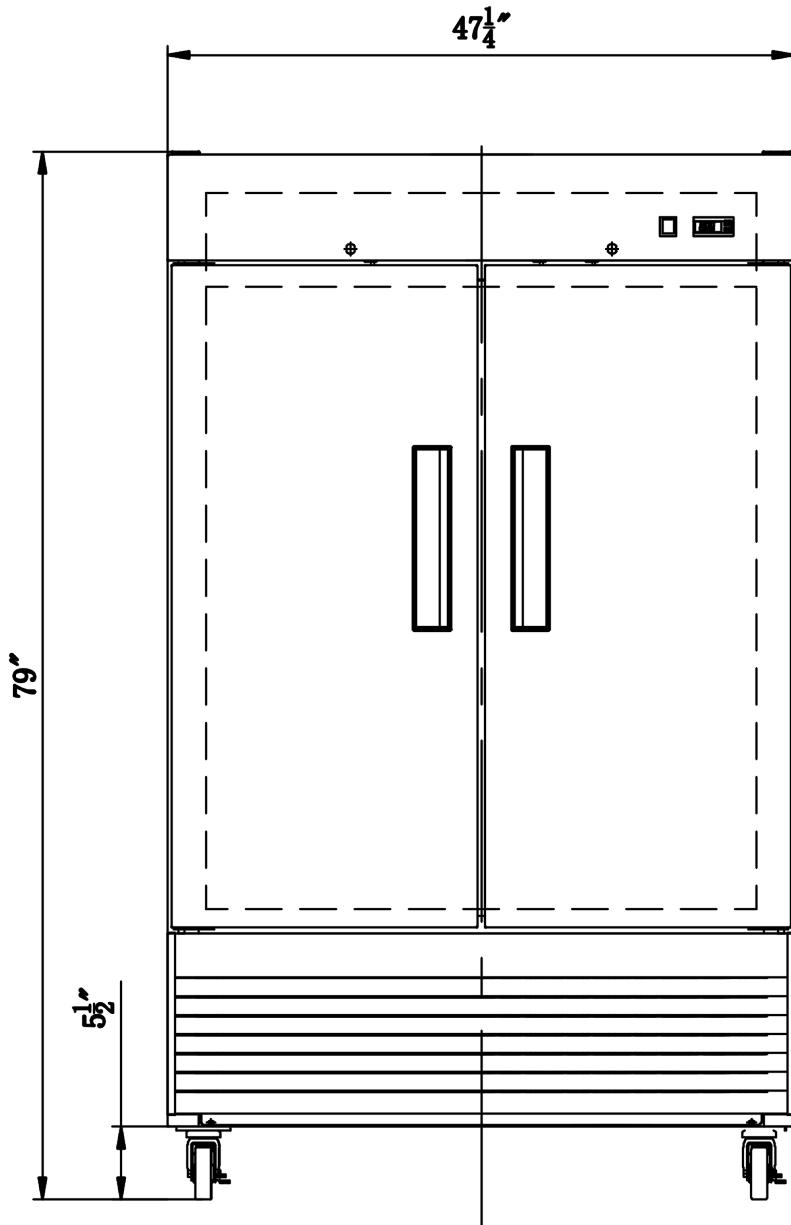

Side View

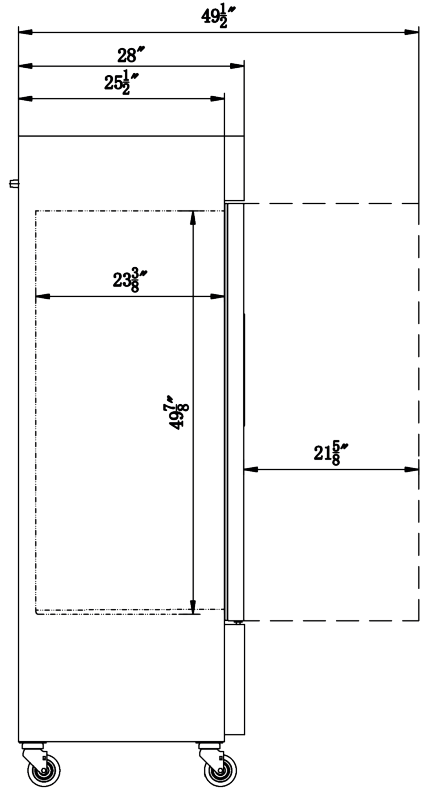

MODEL D47ER

Rated Voltage	110V
Rated Frequency	60Hz
Total Capacity	29.51 cu ft
Insulation Blowing Gas	C-Pentane
Refrigerant	R290

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
D47ER	47 1/4 x 28 x 79	48 7/8 x 30 x 83	220 lbs	6	28



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628

@info@dukersusa.com

www.DukersUSA.com