Item#_____

Qty# _____

Model#_____

Project#_____

DUKERS

*Quality Commercial Refrigeration*

1 YEAR WARRANTY PARTS & LABOR

# GASRANGE

## DCR24-GM/24"GriddleTopGasRange



Castersareinsidetheoven





Knobs

CookingSurface

## PRODUCTDESCRIPTION

- Stainless steel exterior including front, back sides,kickplate,backguardandovershelf
- Heavyduty12”X12”removable,castiron topgrates
- Oven temperature range between 175°F to 500°F
- 3/4”NPTreargasconnectionandregulator standard.
- Two(2)chromeovenrackperovenstandard, multiplepositionovenrackguides
- Enamelinteriorovenforeasycleaning.
- 6"casterswithlockforeasymobility.
- 3/4"SteelPlate.

| GASRANGE MODEL | DIMENSION | | |
|---|---|---|---|
| | Width | Depth | Height |
| DCR24-GM | 24in | 311/2in | 56in |

## HIGH QUALITY STAINLESS STEEL & ROBUSTDESIGN

DUKERS

LosAngeles|SanFrancisco|Dallas
Houston|Florida|Chicago|NewJersey

1-800-931-8628


info@dukersusa.com

www.DukersUSA.com


# DETAILS& SPECIFICATIONS

## DCR24-GM


### FrontView

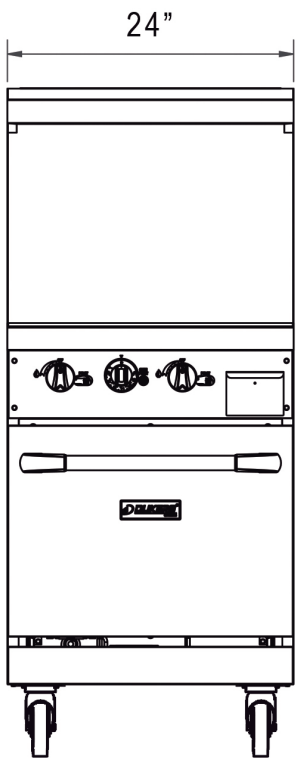


### SideView

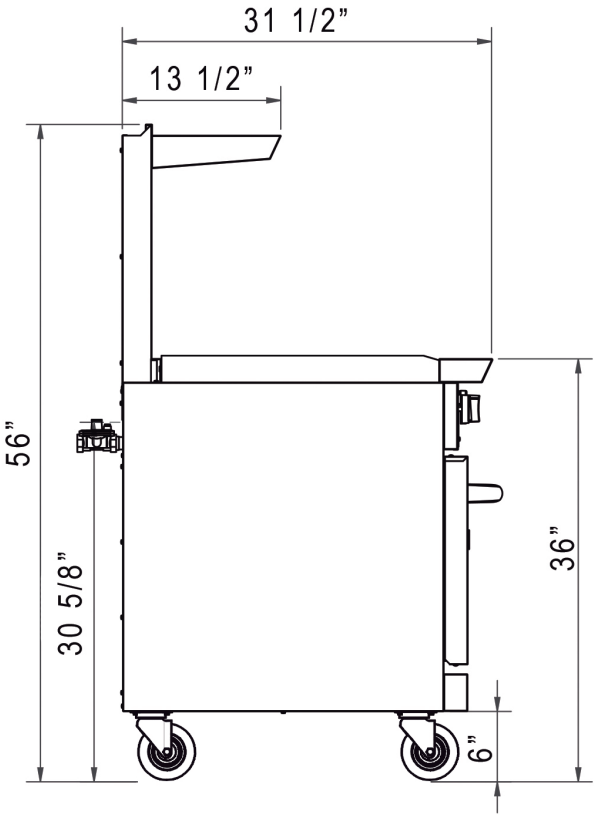


### TopView

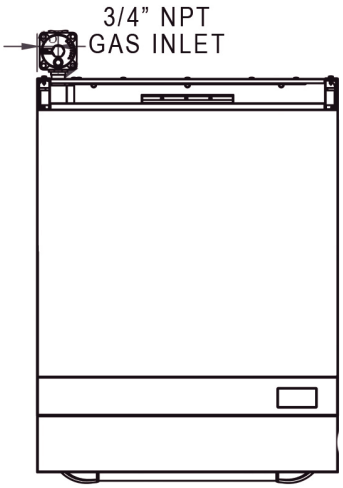


SANITATION C US

Conforms to NSF/ANSI7 (ETL)

PROUD MEMBER CFESA Commercial Food Equipment Service Association

**ProductSpecifications**

| | |
|---|---|
| WORKINGAREA | 24”x20” |
| GASTYPE | LPG/NG |
| OVEN SIZE | 20¾×26×14” |

| | LPG | | NG | |
|---|---|---|---|---|
| | GRIDDLE | OVEN | GRIDDLE | OVEN |
| BURNERS | 2 | 1 | 2 | 1 |
| SINGLEOUTPUTBTU | 26000BTU | 30000BTU | 26000BTU | 30000BTU |
| NOZZLE# | 53 | 52 | 43 | 40 |
| TOTALOUTPUTBTU | 82000BTU | | 82000BTU | |
| GASPRESSURE | 10 | | 5 | |

| Model | PackagingDimensions(inches) | | | NetWeight (lbs) | ShipWeight (lbs) | ContainerCapacity 40'HQ |
|---|---|---|---|---|---|---|
| | W | D | H | | | |
| DCR24-GM | 26” | 364/5” | 381/5” | 304.70 | 370.70 | 86 |

DUKERS

LosAngeles|SanFrancisco|Dallas
Houston|Florida|Chicago|NewJersey

1-800-931-8628

info@dukersusa.com

www.DukersUSA.com