



ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

Electric Steam Tables

Standard Features

- Fully insulated open wells – all four sides and bottom of wells are insulated by fiberglass, 8" deep, dry heating style, open well design
- Temperature control – individual infinite switch controls each well
- Two type heat elements – 475 watt per well for EHS-OW-2/3/4 and 750 watt per well for EHS-OW-5
- Stainless steel die-stamped opening – 12"x20", rising lip around well helps keep well clean and makes food pans easy to load and unload
- Poly cutting board – 7" wide x 1/2" thick with 18 gauge stainless steel support shelf and brackets
- 18 gauge stainless steel top, body and under shelf
- Stainless steel tubular legs with adjustable stainless steel feet, giving tables a strong structure
- Indicator light of each well shows both power on and element heating
- Mechanical guards on all switches for safety and reliability
- Standard with water pans

Optional Accessories

- Casters (set of 4) item # CSTE-A-2-016
- Overshelf/Sneeze-guard:
MROS-2ST, MROS-3ST, MROS-4ST,
MROS-5ST

MODELS:

EHS-OW-2 / EHS-OW-3 / EHS-OW-4 / EHS-OW-5

EHS-OW-2



EHS-OW-5



EHS-OW-3



EHS-OW-4



MROS-2ST



$30\frac{1}{5} \times 12\frac{1}{5} \times 16\frac{1}{10}$
(50lb weight capacity)

MROS-3ST



$44\frac{3}{10} \times 12\frac{1}{5} \times 16\frac{1}{10}$
(70lb weight capacity)

MROS-4ST



$58\frac{2}{5} \times 12\frac{1}{5} \times 16\frac{1}{10}$
(80lb weight capacity)

MROS-5ST



$72\frac{1}{2} \times 12\frac{1}{5} \times 16\frac{1}{10}$
(85lb weight capacity)



1 YEAR PARTS AND LABOR WARRANTY



REV. 08/26



ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com


www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington




SPECIFICATIONS

Models	Wells	Voltage (V)	Frequency (Hz)	Rated Power (W)	Pan Type	Plug	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
EHS-OW-2	2	120	60	950	(2) Full-Size Food Pan, 6" Depth	NEMA 5-15P	30×29 ^{1/2} ×33 ^{1/2}	78	87
EHS-OW-3	3	120	60	1425	(3) Full-Size Food Pan, 6" Depth	NEMA 5-15P	44 ^{1/8} ×29 ^{1/2} ×33 ^{1/2}	108	121
EHS-OW-4	4	120	60	1900	(4) Full-Size Food Pan, 6" Depth	NEMA 5-20P	58 ^{1/4} ×29 ^{1/2} ×33 ^{1/2}	139	155
EHS-OW-5	5	240	60	3750	(5) Full-Size Food Pan, 6" Depth	NEMA 6-20P	72 ^{1/4} ×29 ^{1/2} ×33 ^{1/2}	169	220

PLAN VIEW

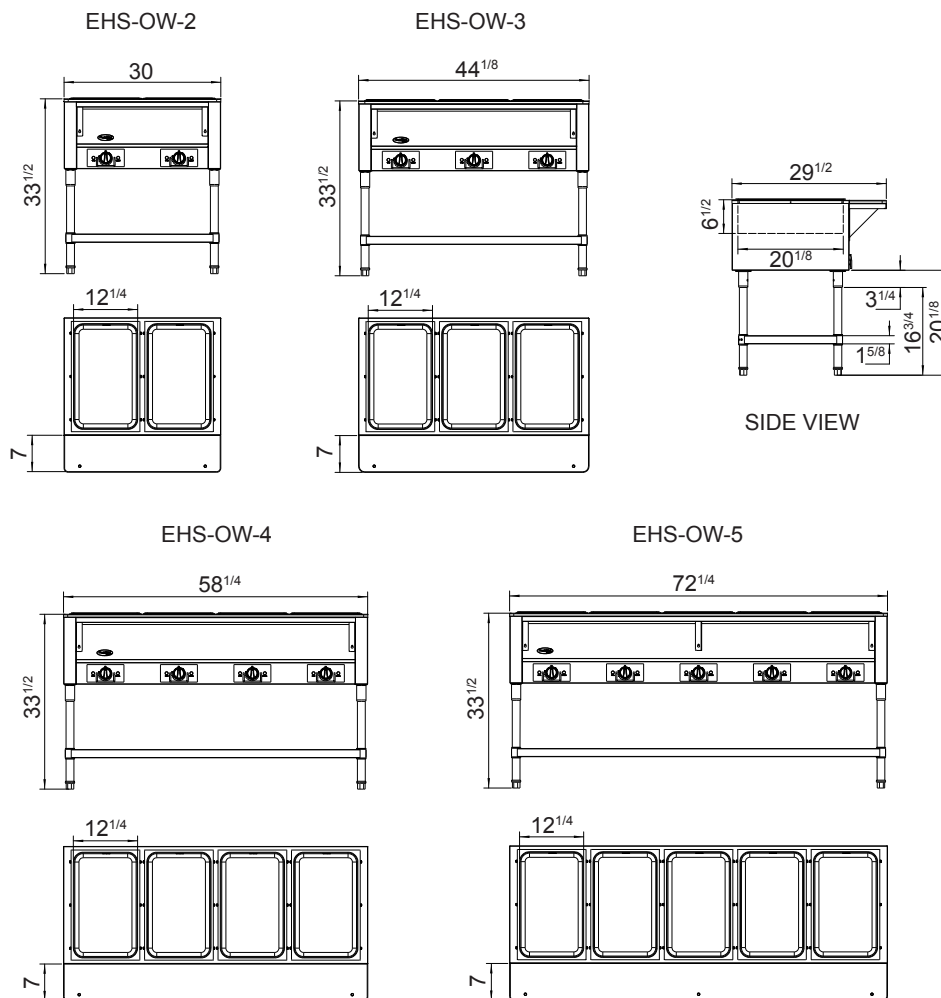

SIDE VIEW



Fully insulated wells Stainless steel exterior Temperature control Stainless steel legs

