



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington


COFFEE AND TEA BREWERS

MODELS:

CB3L011 / CB3L021 / CB3T011 / CB3T021

Standard Features

- **Brew Capacity:** Up to 160 cups (12 gallons) of coffee or tea per hour
- **Dual Voltage:** Field adjustable for both 120v2 Wire+Ground or 208-240v3 Wire+Ground
- **Sprayhead Technology:** Evenly distributes water over coffee grounds for uniform extraction and consistent flavor
- **Pre-Infusion:** Allows grounds to bloom prior to the brew cycle for improved extraction and flavor
- **Pulse Brew:** Uses timed water pulses to promote even saturation and consistent extraction
- **Energy-Saver Mode:** Reduces tank temperature during idle periods to conserve energy
- **Brew Counter:** Tracks total brew cycles for maintenance scheduling and usage monitoring
- **Programmable Brew Recipes:** Saves customizable brewing parameters for simplified one-touch operation
- USB Programming for easy settings upload
- Single and twin models available, both with a hot water dispenser
- Estimated Hot Water Recovery Rate: 3.0–3.7 gal/hr at 1440W, 4.6–7.4 gal/hr at 2180–2880W.
- Stainless steel body for durability and easy cleaning
- Supports standard 1–1.5 Gal and larger coffee servers or tea dispensers
- 5" color touchscreen with programmable brewing and intuitive digital controls
- Water inlet is 3/4" MNPT with water pressure at 7.3 – 87 psi and water flow rate at 0.05 – 0.6 Mpa.
- Includes a 3/8" O.D. Push-To-Connect x 3/4" FNPT water inlet connector and 3/8" O.D. tubing for easy water line installation
- For operation and heat dissipation, leave at least 5-7/8" (150mm) of clearance on all sides of the equipment.

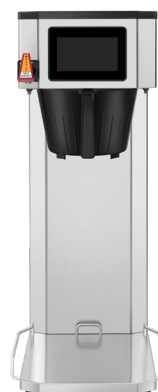

**CB3L011
SHORT, SINGLE**



**CB3L021
SHORT, TWIN**



**CB3T011
TALL, SINGLE**



**CB3T021
TALL, TWIN**



1 YEAR PARTS AND LABOR WARRANTY



Conforms to ANSI
STD Z83.11b-2009 (2011)
Certified for CSA
STD 1.4B-2009 (2011)
Conforms to NSF/ANSI STD.4



REV. 07/26



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com


www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington


SPECIFICATIONS

Models	Capacity (gal/L)	Voltage (V/Hz/Ph)	Power (W)	Amps (A)	Plug Type	Exterior Dimensions (inch/mm)	Package Dimensions (inch/mm)	Net Weight (lb/kg)	Gross Weight (lb/kg)
CB3L011	1/3.79	120/208-240 60Hz	1440/ 2180-2880	12/ 10.4-12	NEMA 5-15P (Standard)/ NEMA L14-20 (Optional)	11 ^{5/8} x 21 ^{7/8} x 28 ^{1/2} / 293 x 554 x 723	14 ^{5/8} x 26 x 30 ^{3/4} / 370 x 660 x 780	36.44/ 16.53	46.30/ 21
CB3L021	3/11.36	120/208-240 60Hz	1440/ 2180-2880	12/ 10.4-12	NEMA 5-15P (Optional)/ NEMA L14-20 (Standard)	21 ^{5/8} x 21 ^{7/8} x 28 ^{1/2} / 548 x 554 x 723	24 ^{3/8} x 26 x 30 ^{3/4} / 620 x 660 x 780	57.32/ 26	71.21/ 32.3
CB3T011	1.5/5.68	120/208-240 60Hz	1440/ 2180-2880	12/ 10.4-12	NEMA 5-15P (Standard)/ NEMA L14-20 (Optional)	11 ^{5/8} x 21 ^{7/8} x 35 ^{3/4} / 293 x 554 x 908	14 ^{5/8} x 26 x 38 ^{5/8} / 370 x 660 x 980	42.88/ 19.45	54.01/ 24.5
CB3T021	3/11.36	120/208-240 60Hz	1440/ 2180-2880	12/ 10.4-12	NEMA 5-15P (Optional)/ NEMA L14-20 (Standard)	21 ^{5/8} x 21 ^{7/8} x 35 ^{3/4} / 548 x 554 x 908	24 ^{3/8} x 26 x 38 ^{5/8} / 620 x 660 x 980	61.40/ 27.85	77.16/ 35


PLAN VIEW

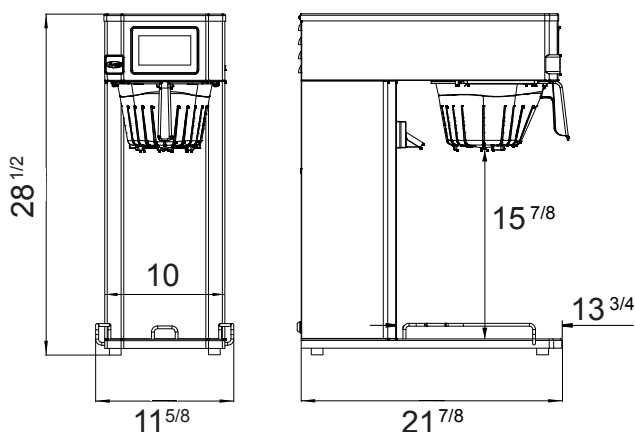


CB3L011

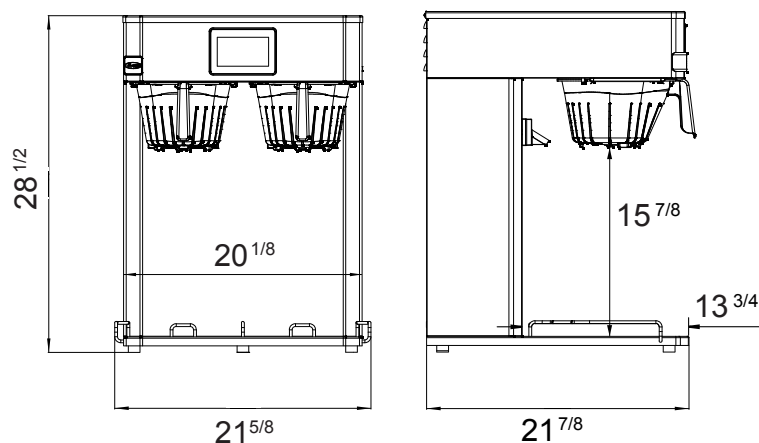

CB3L021

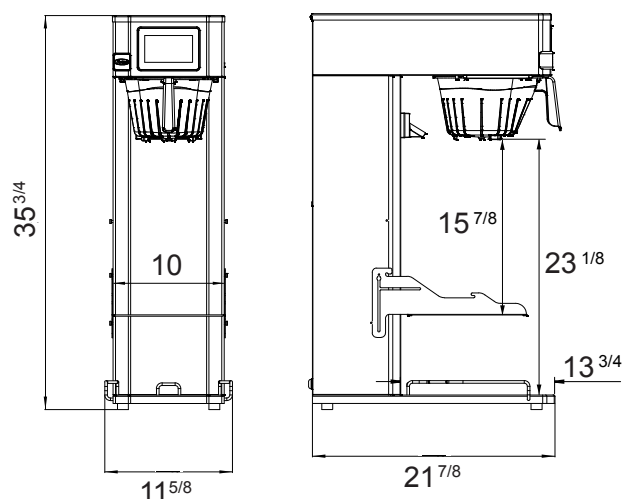

CB3T011

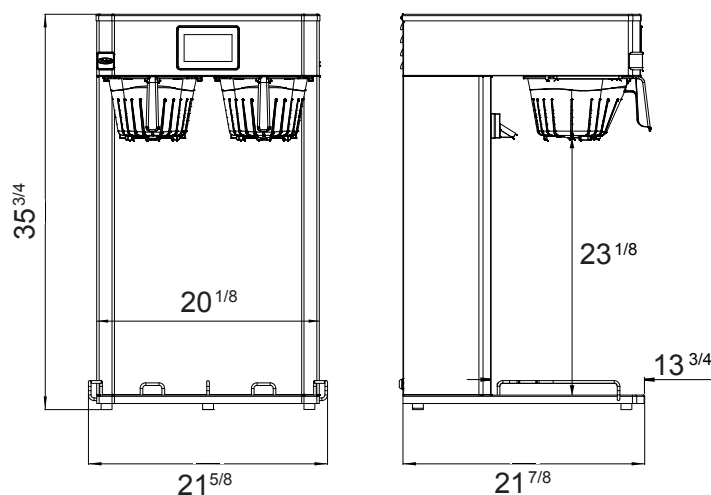

CB3T021



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

TEA DISPENSERS

Standard Features

- Removable lid for easy refilling and cleaning
- Available in 3 Gal (11.36 L) and 5 Gal (18.93 L) capacities
- Stainless steel body
- Durable no-drip spigot for consistent dispensing
- TD-3L-ND and TD-5L-ND only work with short coffee brewer models (CB3L011 and CB3L021)
- TD-3T-DT and TD-5T-DT work with both short and tall coffee brewer models
- NSF certified

MODELS:

TD-3L-ND / TD-3T-DT / TD-5L-ND / TD-5T-DT



**TD-3L-ND
SHORT MODEL
NO DRIP TRAY**



**TD-3T-DT
TALL MODEL
WITH DRIP TRAY**



**TD-5L-ND
SHORT MODEL
NO DRIP TRAY**



**TD-5T-DT
TALL MODEL
WITH DRIP TRAY**



1 YEAR PARTS AND LABOR WARRANTY



REV. 07/26



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com


www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington


SPECIFICATIONS

Models	Capacity (gal/L)	Exterior Dimensions (inch/mm)	Package Dimensions (inch/mm)	Net Weight (lb/kg)	Gross Weight (lb/kg)
TD-3L-ND	3/11.36	6 ^{3/4} x 13 ^{3/4} x 15 ^{3/8} / 170 x 350 x 390	7 ^{3/4} x 16 x 16 ^{3/8} / 197 x 406 x 416	5.07/2.30	6.57/2.98
TD-3T-DT	3/11.36	6 ^{3/4} x 14 ^{3/4} x 21 ^{1/4} / 170 x 373 x 538	7 ^{3/4} x 16 x 22 / 197 x 406 x 559	6.33/2.87	8.07/3.66
TD-5L-ND	5/18.93	6 ^{3/4} x 19 ^{3/8} x 15 ^{3/8} / 170 x 495 x 390	7 ^{1/8} x 21 ^{1/2} x 16 ^{3/8} / 181 x 546 x 416	6.88/3.12	8.62/3.91
TD-5T-DT	5/18.93	6 ^{3/4} x 20 ^{1/4} x 21 ^{1/4} / 170 x 510 x 538	7 ^{1/8} x 21 ^{1/2} x 22 / 181 x 546 x 559	8.55/3.88	10.63/4.82


PLAN VIEW

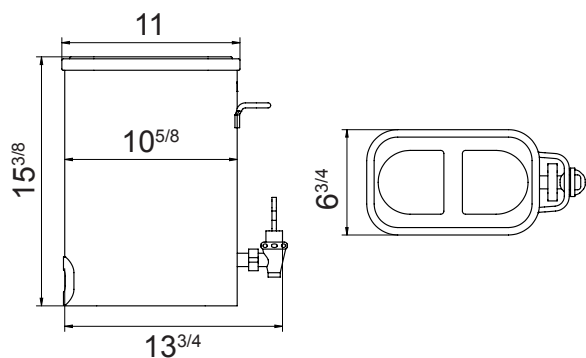


TD-3L-ND

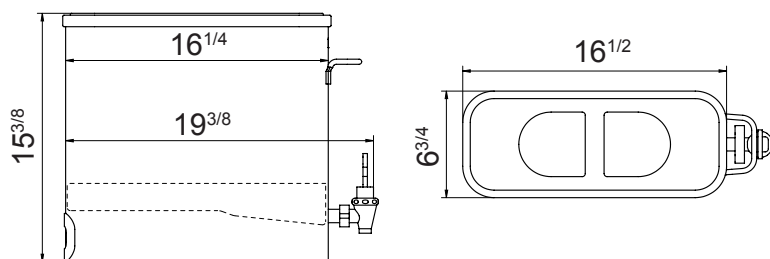

TD-5L-ND

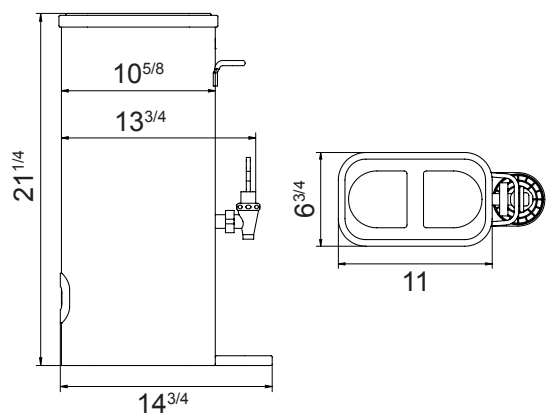

TD-3T-DT

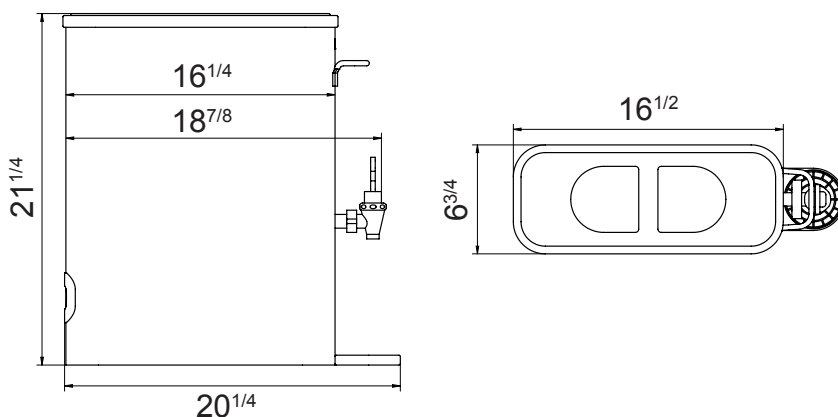

TD-5T-DT



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

COFFEE DISPENSERS

Standard Features

- Stainless steel interior for heat retention
- 1.5 Gal (5.68 L) capacity
- Double-wall vacuum insulation to maintain liquid temperature at or above 180°F for up to 4 hours
- Drip-free dispensing spout for precise pouring
- Brew-through lid for direct brewing
- Compatible with short coffee brewer models (CB3L011 and CB3L021)
- CD-15-L and CD-15-L-WS include a built-in level indicator
- NSF certified

Optional Accessories

- Stand for CD-15-NL : NL-stand
- Stand for CD-15-L : L-stand

MODELS:

CD-15-NL/ CD-15-NL-WS / CD-15-L/ CD-15-L-WS



CD-15-NL
1.5 GAL, NO STAND
NO LEVEL INDICATOR



CD-15-NL-WS
1.5 GAL, WITH STAND
NO LEVEL INDICATOR



CD-15-L
1.5 GAL, NO STAND
WITH LEVEL INDICATOR



CD-15-L-WS
1.5 GAL, WITH STAND
WITH LEVEL INDICATOR



1 YEAR PARTS AND LABOR WARRANTY



REV. 08/26



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com


www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington


SPECIFICATIONS

Models	Capacity (gal/L)	Exterior Dimensions (inch/mm)	Package Dimensions (inch/mm)	Net Weight (lb/kg)	Gross Weight (lb/kg)
CD-15-NL	1.5/5.68	8 ^{7/8} x 12 ^{1/8} x 15 / 227 x 305 x 380	11 ^{1/2} x 15 ^{5/8} x 17 / 292 x 397 x 432	6.61/3	7.72/3.5
CD-15-NL-WS	1.5/5.68	8 ^{7/8} x 14 ^{1/8} x 22 ^{1/2} / 227 x 305 x 570	11 ^{1/2} x 15 ^{5/8} x 25 ^{1/4} / 292 x 397 x 641	9.02/4.09	10.23/4.64
CD-15-L	1.5/5.68	8 ^{7/8} x 13 ^{5/8} x 15 ^{1/4} / 227 x 339 x 388	11 ^{1/2} x 15 ^{5/8} x 17 / 292 x 397 x 432	6.61/3	7.72/3.5
CD-15-L-WS	1.5/5.68	8 ^{7/8} x 14 ^{3/8} x 22 ^{3/4} / 227 x 339 x 578	11 ^{1/2} x 15 ^{5/8} x 25 ^{1/4} / 292 x 397 x 641	9.02/4.09	10.23/4.64


PLAN VIEW

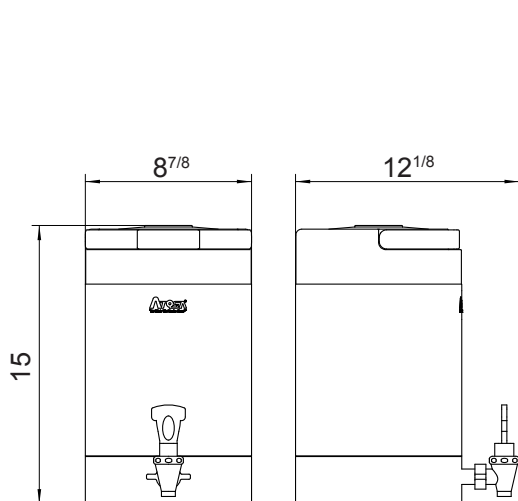


CD-15-NL

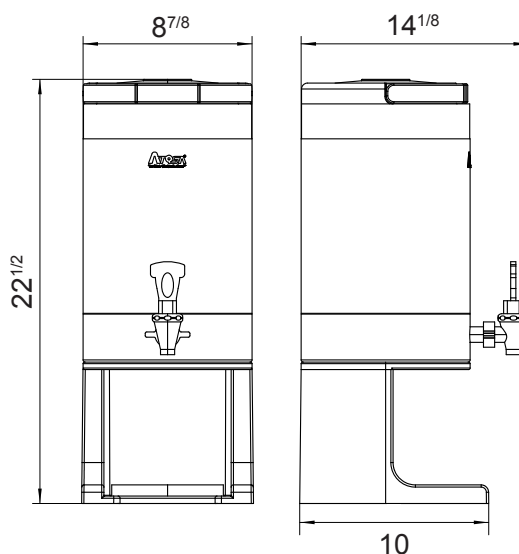


CD-15-NL-WS

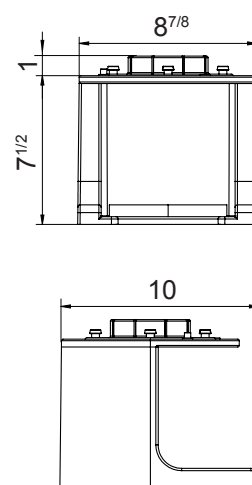


NL-Stand

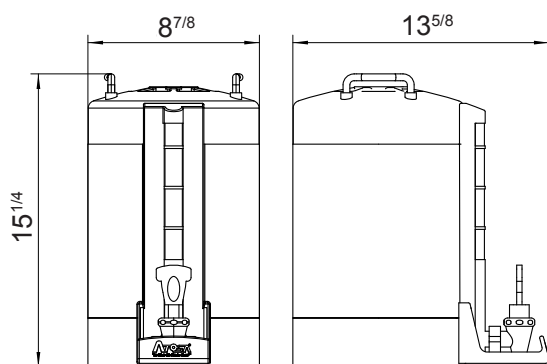

CD-15-L

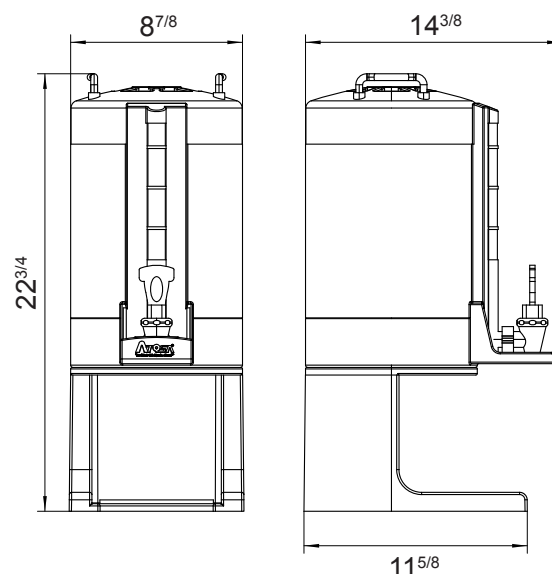

CD-15-L-WS

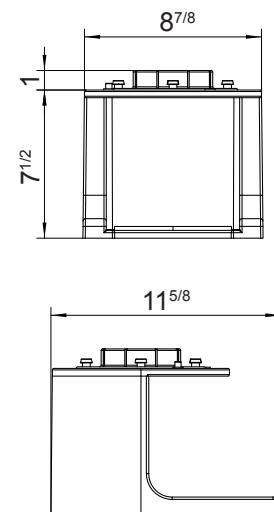

L-Stand