



Vending Cart

Models: CVC75 – Base and 12" Safety Barrier
CVC75B – Base Only

Project _____

Item No. _____


Model No. _____

Quantity _____




Features & Benefits

- Modern and versatile mobile vending cart designed for indoor or outdoor usage.
- Perfect for use in schools, colleges, hotels, stadiums and offsite food venues.
- Tough and durable, the high-density polyethylene construction is impact resistant and will not dent, crack, rust or break.
- Easy to clean. Includes a drain faucet for drainage and cleaning.
- Insulated wells hold five (5) 6" GN 1/1 food pans. Each unit comes with one well cover to create a work area over one well.
- 12" high security shield protects against contamination and theft.
- Choose from standard or custom laminated all-weather vinyl front décor (26¼" x 115").
- Submit your art files for a full color custom front.
- Ports for power cord and/or data cabling routed throughout the cart.
- 1½" Umbrella slot fits a standard umbrella (umbrella not included).
- Bottom compartments, Left (A) and Right (B), include adjustable sliding shelves for easy access of lower items size 17¼" x 17¼".
- Bottom center compartment (C) will hold an EPP300 or UPC300 for hot or cold holding, 18¼" x 21¼".
- Five (5) each 6" heavy-duty, non-marking plate casters. 2 swivel lock with break casters allow easy change from swivel to rigid. 3 swivel with break for easy maneuvering.
- Cart will fit through a 36" doorway, opening must be a minimum of 33⅝".
- Weight capacity: 800 lbs. (evenly distributed).
- Optional 6" or 12" Merchandising Display Case fits on left or right side of top shelf.
- Optional 16" end tables for right, left or both sides of the cart.
- Color: Black (110).
- NSF Listed.
- Patented pending for design.
- Recommended accessories:
 - End table to hold trays, condiments, or paper goods.
 - Divider Bars for organizing full and fractional size GN pans.
 - Insulated transport unit to hold hot or cold items for replenishing.
 - Buffet Camchillers® to keep items cold safely for 4+ hours.

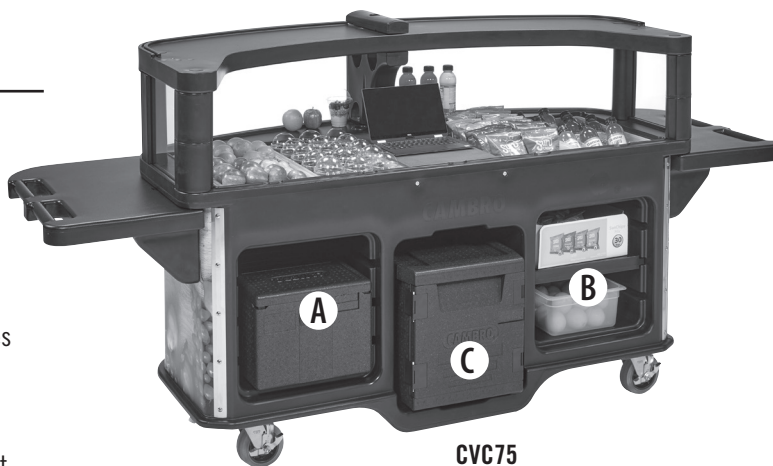

CVC75
(with optional end tables)

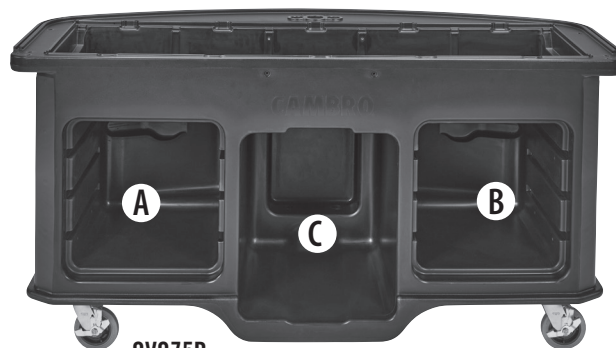

CVC75B
(Base Unit)

Approvals



Vending Cart




Models CVC75, CVC75B

Project _____

Item No. _____

Model No. _____

Quantity _____

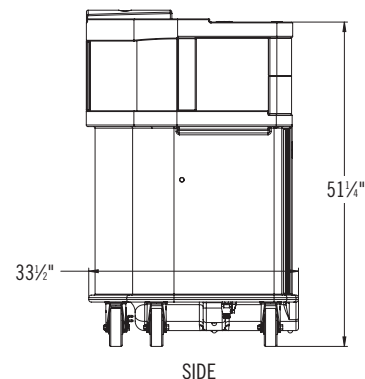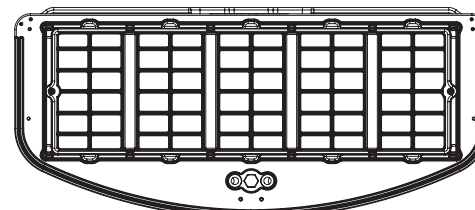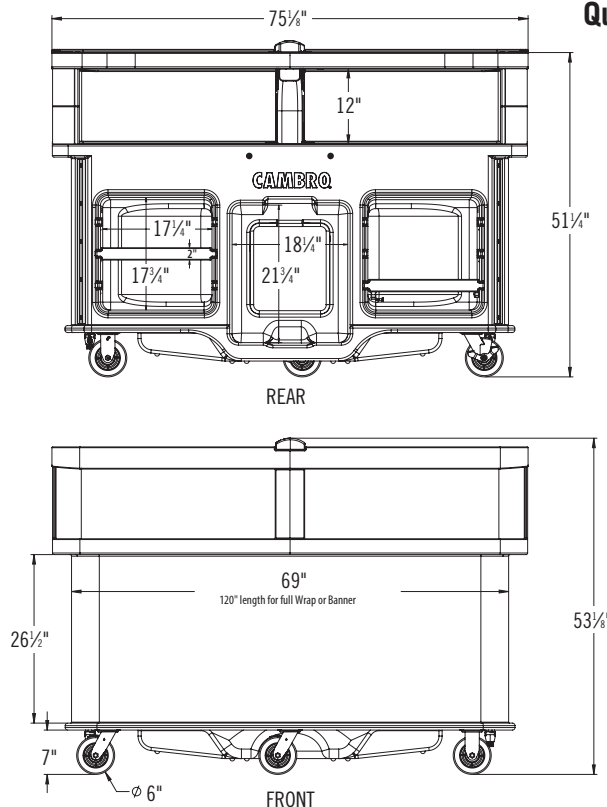

Cart will fit through a 36" doorway, opening must be a minimum of 33 3/8".

Specifications

Dimension Tolerance: +/- 1/4" (0,64 cm)

Code	Description	Load Capacity	Overall Dimensions L x W x H
CVC75	Vending Cart with 5 wells (with 12" Safety Barrier)	800 lbs. (evenly distributed) (363 kg)	75 1/4" x 33 1/2" x 53 3/8"
CVC75B	Vending Cart with 5 wells	800 lbs. (363 kg)	75" x 33 1/2" x 38 1/4"

Optional Accessories

- End Table (Left) ☐ CVCLET – Black (110)
- End Table (Right) ☐ CVCRET – Black (110)
- 6" Merchandising Display ☐ CVC75DC6 – Clear (135)
- 12" Merchandising Display ☐ CVC75DC12 – Clear (135)

- 2 Base Shelves ☐ CVC75LSRL – Black (110)
- Tow Hitch ☐ CVC75TOW – (000)

Architect Specs

The CVC75 and/or CVC75B shall be a modern and versatile mobile vending cart manufactured by Cambro Mfg. Co, Huntington Beach, CA. It shall hold five (5), 6" GN 1/1 food pans in the well made of high-density, polyethylene construction. The CVC75 shall come with 12" Safety Barrier to protect against contamination and theft. It shall come with a standard or custom laminated all-weather vinyl front décor. It shall have ports for power cord and/or data cabling routed throughout the cart. The bottom of the cart shall have left and right compartments of 17 1/4" x 17 1/4" and a center compartment to hold 18 1/4" x 21 1/4". The cart shall have five (5) 6" heavy-duty, non-marking plate casters; 2 swivel lock with break casters allow for easy change from swivel to rigid, and 3 swivel with break. It shall be NSF listed and available in 1 color – Black (110).

Approvals



CAMBRO
TRUSTED FOR GENERATIONS™
www.cambro.com

Information and specifications are subject to change without notice. Please confirm at time of order.
© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056-U.S.A.
Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003
Printed in USA. 05/20