

USER MANUAL

HOT BEVERAGE / HOT TOPPING DISPENSER




MODEL: CHOCO5, CHOCO10R, CHOCO10



USR Brands, Inc.

Phone: 800-764-1172 | www.usrestaurant.com | sales@usrestaurant.com


Assembling:

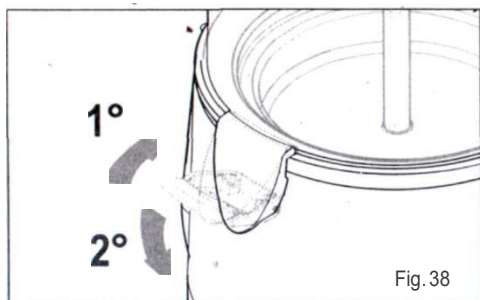


Fix the bowl to the machine body using the relevant hook—on handles.





Insert the mixer auger into its seating.

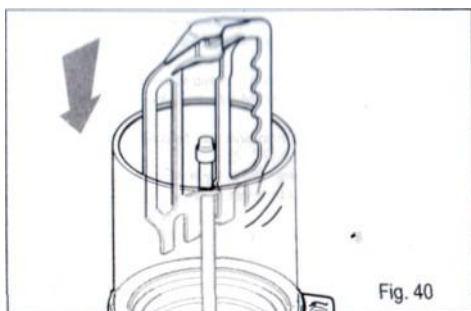

Insert the mixer into its seating following the steps described in paragraph 16.

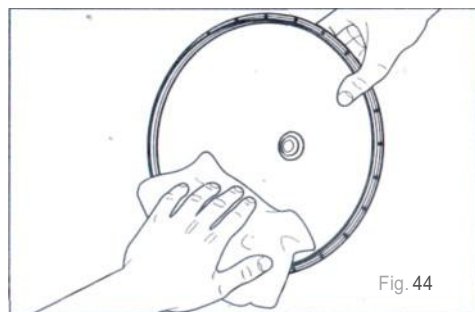

Clean the lid using a damp cloth. Rinse thoroughly using clean water.

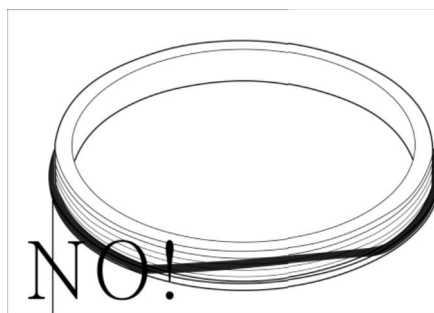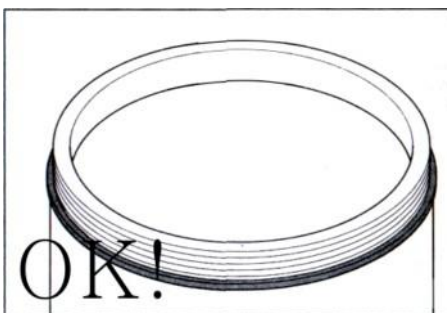


Here show the bowl gasket correctly assembled. If the gasket does not perfectly adhere to the bowl edge, there will cause liquid leaking.

Main components


The main components making up the machine are :

- | | |
|--------------------------|-----------------------|
| 1 bowl lid | 8 heater |
| 2 bowl | 9 bowl hook-on handle |
| 3 mixer | 10 main body |
| 4 product dispenser unit | 11 LED display |
| 5 drip tray grid | 12 power switch |
| 6 drip tray | 13 lower body |

USRESTAURANT® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE

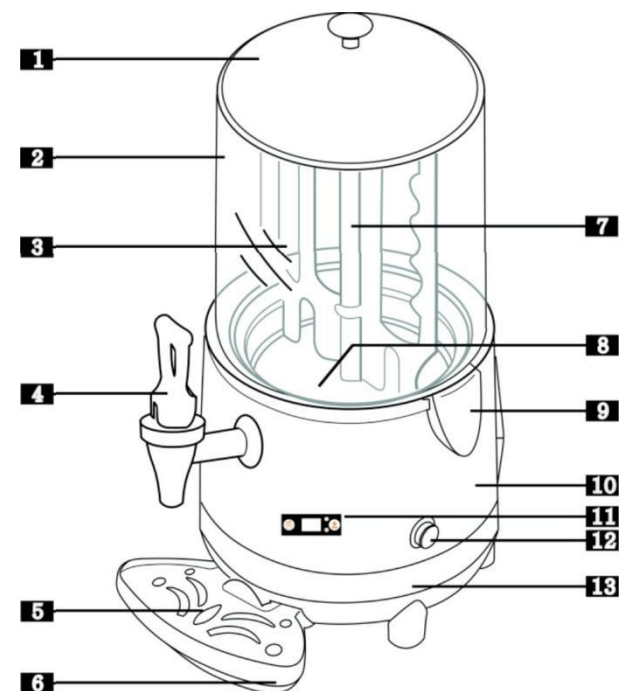


Operation

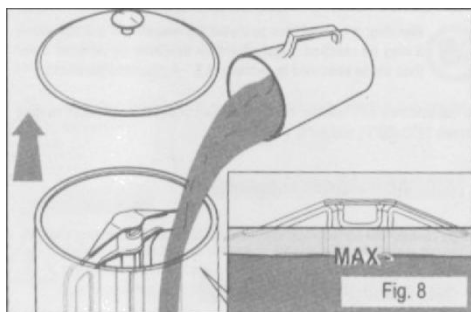

Remove the lid and pour the beverage prepared according to the manufacturer's instruction into the bowl. Never exceed the maximum level which is marked-MAX- on the tray itself.

The heating temperature was between : 130V—90V.

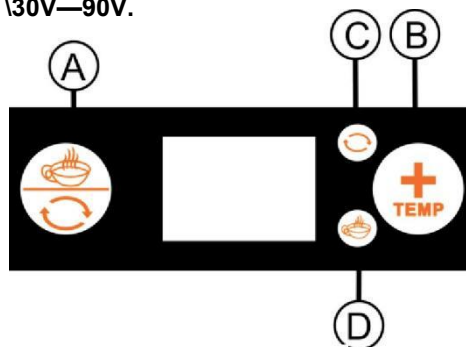


A : Heating k mixing switch

B : temperature adjust

C : mixing light


D : heating fight

Power on, press A, the mixer start work, C light on. Press A again, the heater start work, D fight on. Press A till both C and D fight off. Then press B and hold on till the temperature goes up. Release B till the thermostat goes to where your required temperature.

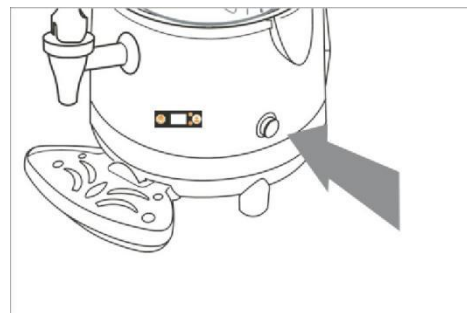


Press the main switch to start the machine.

Lit LED--- machine on
LED off--- machine off

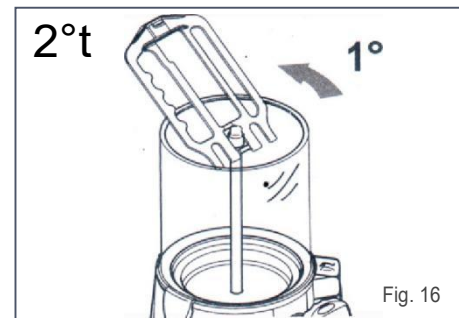


Tilt the mixer and slide it up wards, as illustrated in the figure, to remove it completely.

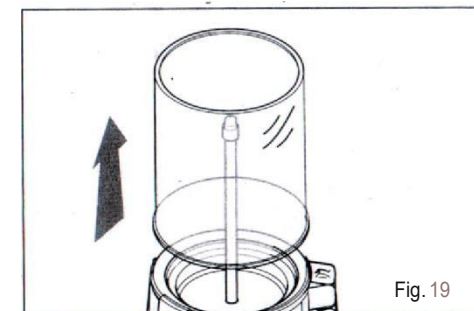


Slid the bowl upwards using both hands.

Attention:

It's not allowed to remove the bowl if there is liquid inside the bowl.

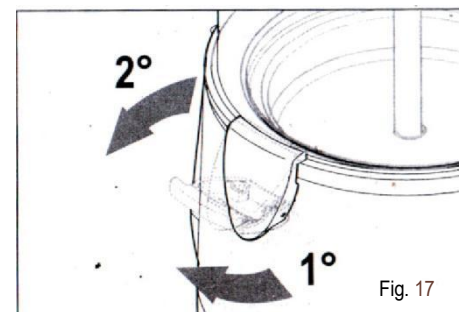


Unhook the bowl hook on to free the bowl from the machine body.

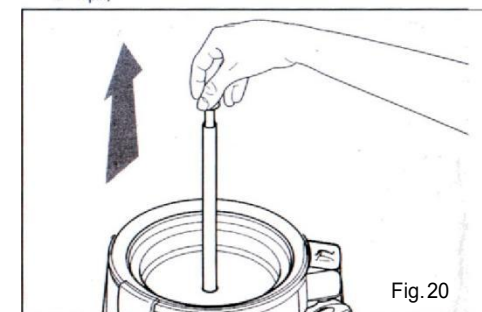


Slide the mixing auger upwards with one hand, taking care to grip it by the rotation pin.


Clean and maintenance

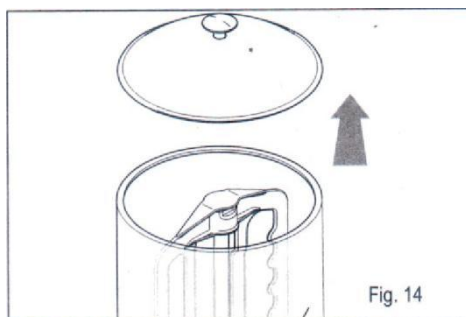


Take off the lid, as pic showed.

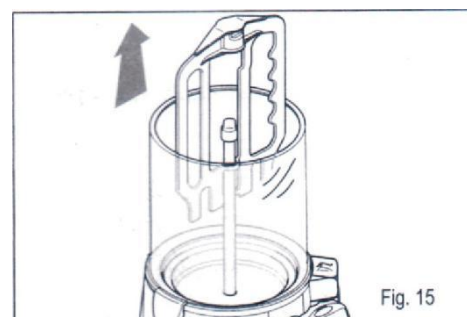

Slid the mixer upwards to remove it. Keep it in line with the central rod until the bottom slot of the mixer itself is level with the rotation pin.

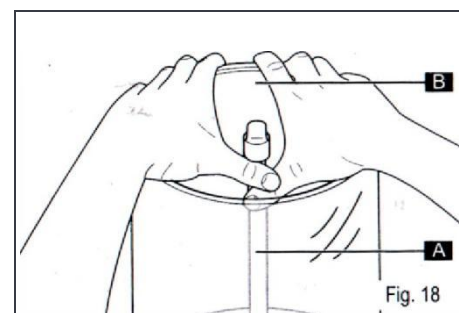

Release the bowl from the machine body, using two fingers to prise it away from the fixed steel part of the mixer auger.

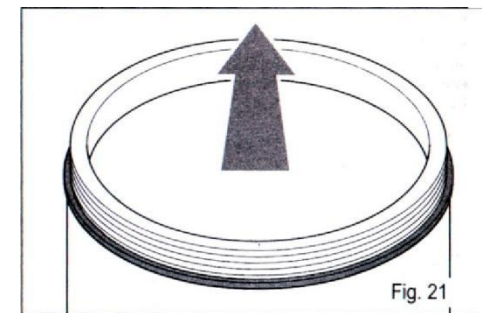

Place the bowl on a flat surface and using both hands, remove the gasket by sliding it upwards in the direction shown by the arrow.