

60" HIGH ISLAND MERCHANDISER



SELF CONTAINED MODEL NO.	DESCRIPTION	LENGTH	WIDTH	HEIGHT	VOLTAGE	AMPS	HP	POWER CORD	EST. SHIP WEIGHT
SC-OD42I-5-B-LED	Self-Contained	60.0"	42.0"	60.0"	115/208-230	15	1 1/2	L14-20P	680
SC-OD42I-5-S-LED	Self-Contained	60.0"	42.0"	60.0"	115/208-230	15	1 1/2	L14-20P	680
SC-OD42I-7-B-LED	Self-Contained	84.0"	42.0"	60.0"	115/208-230	15	1 1/2	L14-20P	863
SC-OD42I-7-S-LED	Self-Contained	84.0"	42.0"	60.0"	115/208-230	15	1 1/2	L14-20P	863
REMOTE MODEL NO.	DESCRIPTION	LENGTH	WIDTH	HEIGHT	VOLTAGE	AMPS	BTUS	POWER CORD	EST. SHIP WEIGHT
R-OD42I-5-B-LED	Remote	60.0"	42.0"	60.0"	115/208-230	15	11,200	Hardwired	680
R-OD42I-5-S-LED	Remote	60.0"	42.0"	60.0"	115/208-230	15	11,200	Hardwired	680
R-OD42I-7-B-LED	Remote	84.0"	42.0"	60.0"	115/208-230	15	13,200	Hardwired	863
R-OD42I-7-S-LED	Remote	84.0"	42.0"	60.0"	115/208-230	15	13,200	Hardwired	863

(ALL WHITE OR ALL BLACK, NO EXTRA CHARGE—IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY)

Prefix	Su x
SC = Self Contained	B = Black
R = Remote	W = White
	S = Stainless Steel
	LED = LED lighting

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Cases are equipped with drains; check your local building codes for connection requirements.
- Specification subject to change without notice



Howard McCray • 831 East Cayuga St • Philadelphia, PA 19124 USA • (215) 464-6800

1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com

60" HIGH ISLAND MERCHANDISER

STANDARD SPECIFICATIONS AND OPTIONAL FEATURES

STANDARD FEATURES

- Glossy Black Aluminum or Stainless Steel Exterior and Interior
- Laminated Top & Base
- LED Lighting Around the Top
- 3 Levels of Stainless Steel Shelving with LED Lighting
- Shelves are Adjustable in 1" Increments
- Price Tag Molding
- Removable Deck Pans for Easy Access
- Built in Product Stops at Deck Area
- All Steel Construction
- Heavy Duty Plexiglas Front Rail
- Foamed in Place with CFC Free Foam
- Heavy Duty Condensing Unit
- Self-contained - Refrigerant:
- Remote expansion valve - R448A
- Electric Condensate Pan, Separate Plug
- Electronically Controlled Refrigeration System
- Even Flo Air Discharge for Balanced Temperatures
- Standard Night Covers
- Optional Top Access Raceway (Electrical & refrigeration connections)
- Optional Laminates
- This Unit Is Only For Display
- Only Refrigerated Products (34°F To 38°F) Should Be Loaded Into This Unit
- Night Covers Should Be Used At Night & When Premises Is Closed.

SC-OD42I-5 R-OD42I-5		SC-OD42I-7 R-OD42I-7	
Length	60"	Length	84"
Width	42"	Width	42"
Height (to display area)	27"	Height (to display area)	27"
Height (to top of tower)	60"	Height (to top of tower)	60"
HP	1-1/2 HP	HP	1-3/4 HP
Refrigerant (SC)		Refrigerant (SC)	
Refrigerant (R)		Refrigerant (R)	
Volts	115/208-230	Volts	115/208-230
Volts Remote	115/208-230	Volts Remote	115/208-230
Amps	15	Amps	16
Amps Remote	7	Amps Remote	8
BTUs	11,200	BTUs	13,200
Plug	NEMA L14-20P	Plug	NEMA L14-20P
Remote	Hardwire	Remote	Hardwire
Condensate Pan Amps	115V 12A	Condensate Pan Amps	115V 12A
Estimate Weight	680 lbs	Estimate Weight	863 lbs

IMPORTANT NOTE:



ALL REFRIGERATED CASES ARE DESIGNED TO OPERATE IN AN ENVIRONMENT OF 75 DEGREES AND 55% RELATIVE HUMIDITY.

PRODUCT MUST BE COOLED BEFORE BEING DISPLAYED WITHIN THE CASE.

DRAIN IS REQUIRED

OD42I-5-LED, OD42I-7-LED - 60" HIGH ISLAND CASE

DRAWINGS - FRONT VIEW

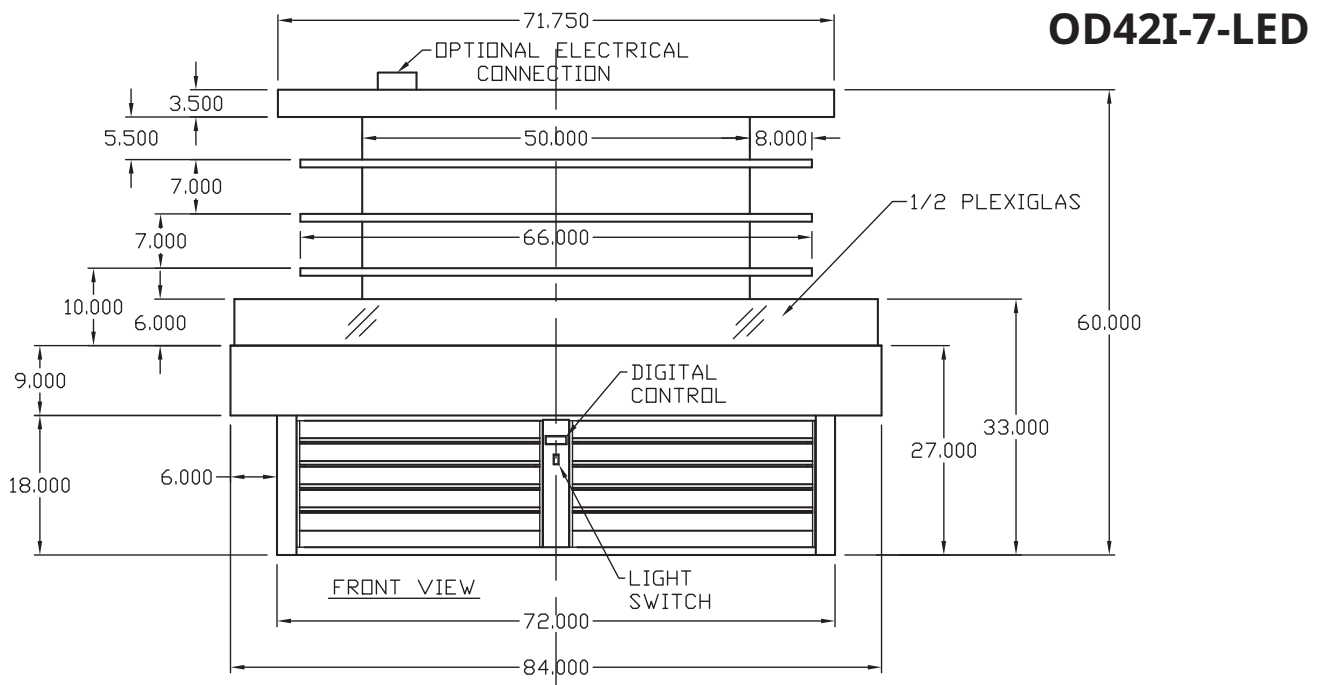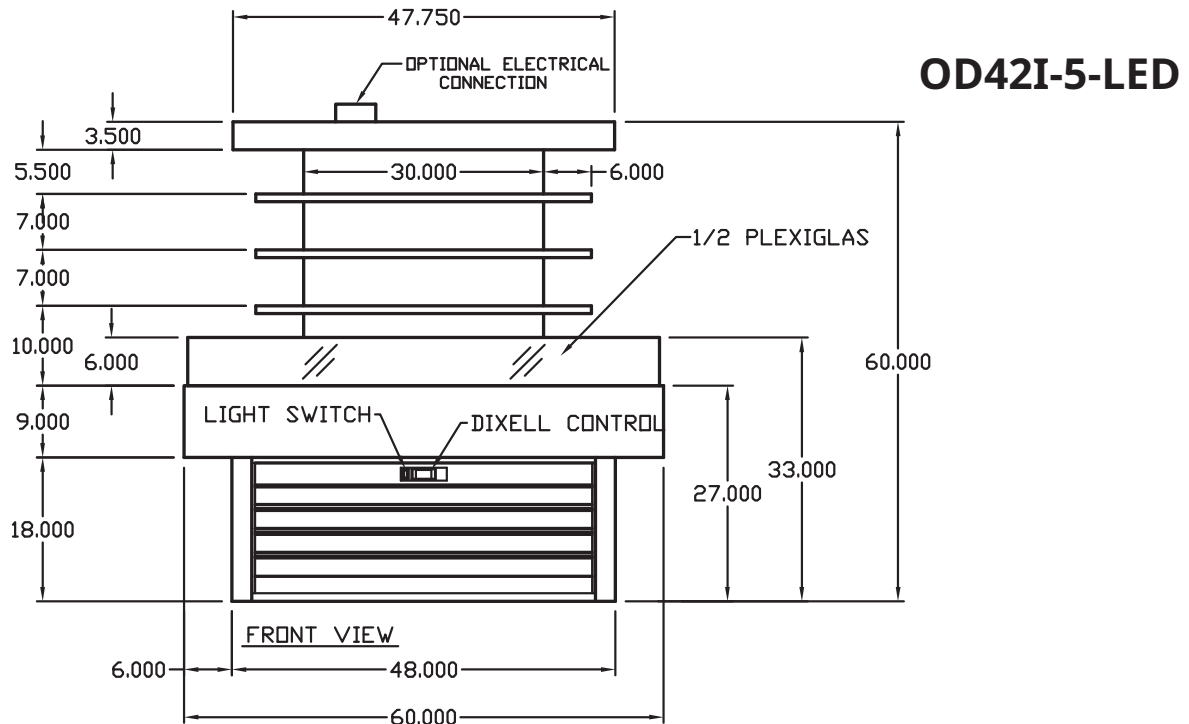

DRAWINGS - SIDE VIEW & PLAN VIEWS

Technical drawing of a rectangular structure with rounded corners, showing dimensions and labels:

- Overall width: 60.000
- Overall height: 42.000
- Top-left corner radius: R5.125
- Top-right corner radius: R10.250
- Bottom-left corner radius: R11.250
- Bottom-right corner radius: R9.750
- Top edge offset: 1.500
- Bottom edge offset: 1.500
- Left edge offset: 1.500
- Right edge offset: 1.500
- Internal width: 17.219
- Internal height: 13.530
- Internal width offset: 11.219
- Internal height offset: 4.906
- Label: REAR
- Label: FRONT
- Label: 1' DIA DRAIN LINE
- Label: OPTIONAL ELECTRICAL CONNECTION

Technical drawing of the rear view of a component. The overall dimensions are 84.000 (width) and 42.000 (height). The drawing shows a rectangular shape with rounded corners. Key dimensions and labels include:

- Overall width: 84.000
- Overall height: 42.000
- Top-left corner radius: R5.125
- Top-right corner radius: R10.250
- Bottom-left corner radius: R11.250
- Bottom-right corner radius: R9.750
- Top edge offset: 1.500
- Right edge offset: 1.500
- Label: REAR
- Label: OPTIONAL ELECTRICAL CONNECTION pointing to a small square feature on the left side.