

REAR LOADING 30E OPEN MERCHANDISER



Model No.	Description	Length	Depth	Height	Voltage	Amps	HP/BTUs	Power Cord	Est. Ship Weight
SC-OD30E-3-SW-B	Self Contained	39.00"	33.50"	72.00"	115	12.0	1/2	5-15P	555
SC-OD30E-4-SW-B	Self Contained	51.00"	33.50"	72.00"	115	13.7	1/2	5-20P	640
SC-OD30E-4-SL-B	Self Contained	51.00"	30.50"	72.00"	115	13.7	1/2	5-20P	680
SC-OD30E-5-SL-B	Self Contained	63.00"	30.50"	72.00"	115/208-230	13.1	1	L14-20P	810
SC-OD30E-6-SL-B	Self Contained	75.00"	30.50"	72.00"	115/208-230	13.1	1	L14-20P	940
R-OD30E-3-SW-B	Remote	39.00"	30.00"	72.00"	115	1.4	3900	NO	500
R-OD30E-4-SW-B	Remote	51.00"	30.00"	72.00"	115	2.2	5200	NO	580
R-OD30E-4-SL-B	Remote	51.00"	30.00"	72.00"	115	2.2	5200	NO	620
R-OD30E-5-SL-B	Remote	63.00"	30.00"	72.00"	115	2.8	6500	NO	730
R-OD30E-6-SL-B	Remote	75.00"	30.00"	72.00"	115	2.8	7800	NO	865

(ALL WHITE OR ALL BLACK, NO EXTRA CHARGE—IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY)

Prefix

SC = Self Contained
R = Remote

Suffix

B = Black
W = White
S = Stainless Steel
LED = LED lighting

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Cases are equipped with drains; check your local building codes for connection requirements.
- Specification subject to change without notice



Howard McCray • 831 East Cayuga St • Philadelphia, PA 19124 USA • (215) 464-6800

1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com

REAR LOADING 30E OPEN MERCHANDISER

STANDARD SPECIFICATIONS AND OPTIONAL FEATURES

CONSTRUCTION

- UL Classified to ANSI/NSF 7
- Foamed in place CFC free foam
- Heavy gauge steel super structure
- Multi deck
- Endless design

INTERIOR

- Black end panels
- Removable Black floor pans
- Black perforated rear wall for even air distribution (swing door only)
- Full length lighting at top of unit
- 3 levels of lit shelving
- 4 levels of product display
- Stylish tag molding on each shelf
- Mirrored client view on slider models

EXTERIOR

- Black ends and front and back
- Black rear doors (hinged units)
- Removeable front grill allows for cleaning and servicing
- 1" bumper
- Choice of end panels

FINISHES

- Black front rail
- Black end trim
- Black end panels
- Black rear panels
- Laminate, and custom paints available

LIGHTING

- 1 row LED at inside top of unit
- 3 rows of LED lighted shelving

ELECTRICAL REQUIREMENTS

- Unit comes with cord and plug
- UL/CUL listed
- See Tech page for details on voltage

REFRIGERATION

- Self Contained expansion valve system
- Remote expansion valve system
- Low velocity fans located below deck area (to insure even flow of air)
- Electronic Control System with automatic air defrost to maintain balanced temperatures
- New high efficiency air screen technology
- Self contained system
- Hermetic unit
- Remotes available

OPTIONAL FEATURES

- **NEW** Sliding and Hinged Rear Access Doors
- Night covers
- Colored bumper
- Stainless steel, laminated or paint
- Product stops on shelving
- Digital thermometer
- Casters or legs
- Evaporator Pan

IMPORTANT NOTE:

ALL REFRIGERATED CASES ARE DESIGNED TO OPERATE IN AN ENVIRONMENT OF 75 DEGREES AND 55% RELATIVE HUMIDITY.

PRODUCT MUST BE COOLED BEFORE BEING DISPLAYED WITHIN THE CASE.

DRAIN IS REQUIRED

REAR LOADING 30E OPEN MERCHANDISER

TECHNICAL DATA

Model No.	SC R	SC-OD30E-3-SW-B R-OD30E-3-SW-B	SC-OD30E-4-SW-B R-OD30E-4-SW-B	SC-OD30E-4-SL-B R-OD30E-4-SL-B	SC-OD30E-5-SL-B R-OD30E-5-SL-B	SC-OD30E-6-SL-B R-OD30E-6-SL-B
Length with (2) ends		39.00"	51.00"	63.00"	75.00"	75.00"
Length without ends		36.00"	48.00"	48.00"	60.00"	72.00"
Height with ends		72.00"	72.00"	72.00"	72.00"	72.00"
Height without ends		71.50"	71.50"	71.50"	71.50"	71.50"
Depth with ends		33.50"	33.50"	30.50"	30.50"	30.50"
(Swing Door Open)		64.75"	76.75"			
Depth without ends		33.00"	33.00"	30.00"	30.00"	30.00"
(Swing Door Open)		64.25"	76.25"			
Endless design		YES	YES	YES	YES	YES
(Dimensions are +/- 1/4")						
Operating temperature		36°F to 40°F	36°F to 40°F	36°F to 40°F	36°F to 40°F	36°F to 40°F
Compressor size HP	SC	1/2	1/2	1/2	1	1
Defrost per day (24 hrs)	Air Defrost	6 per day	6 per day	6 per day	6 per day	6 per day
BTU's at +20°F Evap Temp	R	3900	5200	5200	6500	7800
Voltage	SC	115	115	115	115/208-230	115/208-230
Amperage	SC	12	13.7	13.7	13.1	13.1
Remote Voltage	R	115	115	115	115	115
Amperage, lights & fans only	R	1.4	2.2	2.2	2.8	2.8
Cord and plug	SC	5-15P	5-20P	5-20P	L14-20P	L14-20P
	R	NO	NO	NO	NO	NO
Exterior color		Black	Black	Black	Black	Black
Interior color		Black	Black	Black	Black	Black
# of rows / shelves		3/3	3/3	3/3	3/3	3/6
Shelf size depth		(1) 10.0" (2) 12.0"	(1) 10.0" (2) 12.0"	(1) 10.0" (2) 12.0"	(1) 10.0" (2) 12.0"	(2) 10.0" (4) 12.0"
Shipping Info						
Height		76.00"	76.00"	76.00"	76.00"	76.00"
Depth		44.00"	44.00"	44.00"	44.00"	44.00"
Length		49.00"	61.00"	61.00"	73.00"	87.00"
Gross weight SC/R		555/500	640/580	680/620	810/730	940/865
Cubic feet		95	118	141	141	168

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Cases are equipped with drains; check your local building codes for connection requirements.
- Specification subject to change without notice


Howard McCray • 831 East Cayuga St • Philadelphia, PA 19124 USA • (215) 464-6800

1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com


REAR LOADING 30E OPEN MERCHANDISER

TECHNICAL DATA VIEWS


Side View

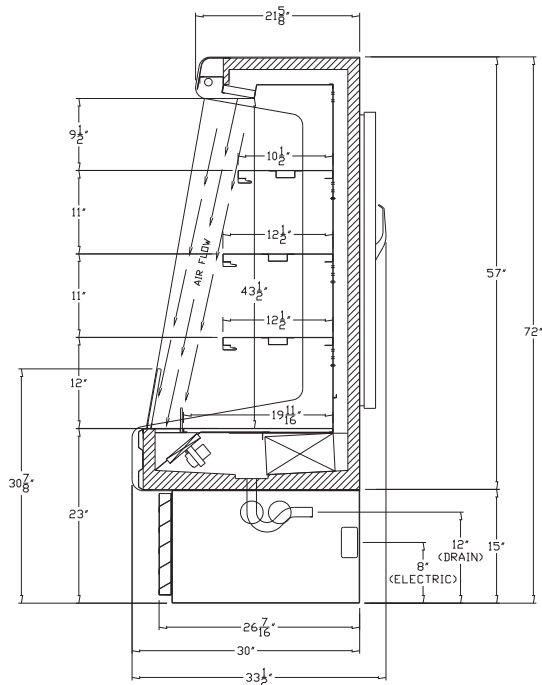

Rear View (Open & Closed)

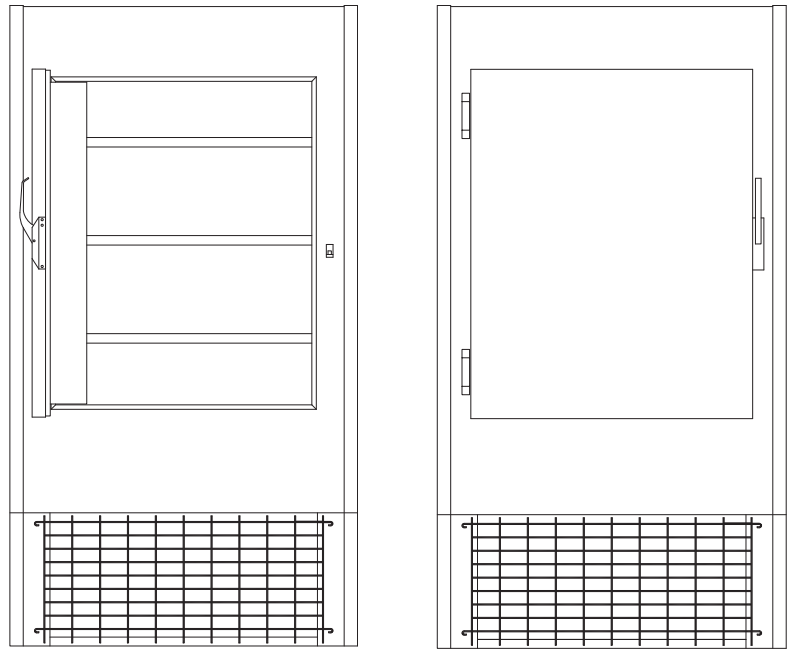

Plan View (3' & 4')

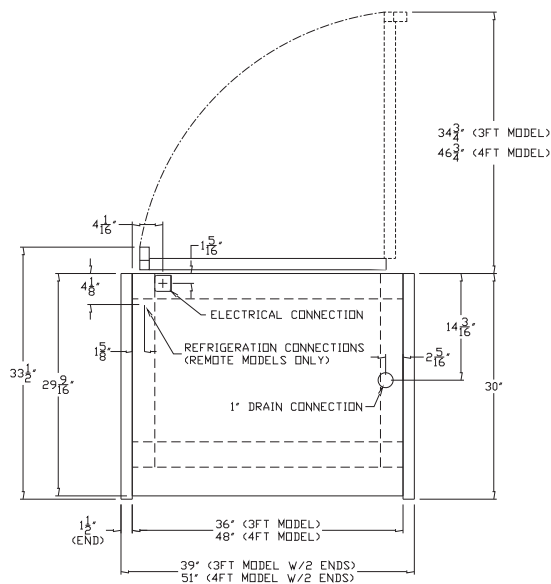

Plan View (5' & 6')

