

OPEN MERCHANDISERS – STRAIGHT SIDES 35E SERIES – 82.25"H – ENDLESS DESIGN – DAIRY



MODEL NO.	DESCRIPTION	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	HP/BTUS	POWER CORD	EST. SHIP WEIGHT
SC-OD35E-3-LED-LC	Self Contained	39"	34.5"	82.25"	115	16.0	1/2	5-20P	710
SC-OD35E-4-LED-LC	Self Contained	51"	34.5"	82.25"	115/208-230	13.0	3/4	L14-20P	975
SC-OD35E-5-LED-LC	Self Contained	63"	34.5"	82.25"	115/208-230	16.0	1	L14-20P	975
SC-OD35E-6-LED-LC	Self Contained	75"	34.5"	82.25"	115/208-230	16.0	1	L14-20P	1185
R-OD35E-3-LED-LC	Remote	39"	34.5"	82.25"	115	2.0	4906	No	575
R-OD35E-4-LED-LC	Remote	51"	34.5"	82.25"	115	3.0	6542	No	790
R-OD35E-5-LED-LC	Remote	63"	34.5"	82.25"	115	4.0	8176	No	790
R-OD35E-6-LED-LC	Remote	75"	34.5"	82.25"	115	4.0	9813	No	1000

(ALL WHITE OR ALL BLACK, NO EXTRA CHARGE—IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY)

Prefix	Suffix
SC = Self Contained	B = Black
R = Remote	W = White
	S = Stainless Steel
	LED = LED lighting

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Cases are equipped with drains; check your local building codes for connection requirements.
- Specification subject to change without notice



Howard McCray • 831 East Cayuga St • Philadelphia, PA 19124 USA • (215) 464-6800

1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com

OPEN MERCHANDISERS – STRAIGHT SIDES 35E SERIES – 82.25"H – ENDLESS DESIGN – DAIRY

STANDARD SPECIFICATIONS AND OPTIONAL FEATURES

CONSTRUCTION

- UL Classified to ANSI/NSF 7
- Foamed in place CFC free foam
- Heavy gauge steel super structure
- Multi deck
- Endless design allows for continuous line up

INTERIOR

- White, black, or stainless steel end panels
- Removable white, black, or stainless steel floor pans
- White, black, or stainless steel perforated rear wall (for even air distribution)
- Full length lighting at top of unit
- 4 levels of lighted shelving
- 5 levels of product display
- Stylish price tag molding on each shelf

EXTERIOR

- White, black, or stainless steel ends and front
- Removeable front grill allows for cleaning and servicing
- 1" bumper

FINISHES

- White, black, or stainless steel front rail
- White, black, or stainless steel end trim
- Laminate, and custom paints available
- White, black, or stainless steel end panels
- White, black, or stainless steel rear panels

LIGHTING

- 1 row at inside top of unit
- 4 rows of lighted shelving
- Lit Canopy

ELECTRICAL REQUIREMENTS

- Self contained unit comes with cord and plug
- UL/CUL listed
- See Tech page for details on voltage

REFRIGERATION

- Low velocity fans located below deck area (to insure even flow of air)
- Electronic Control System with automatic air defrost to maintain balanced temperatures
- New high efficiency air screen technology
- Self contained system
- Copeland hermetic unit
- Remotes available

OPTIONAL FEATURES

- Solid state lighting
- Night covers
- Security cover
- Peg bars
- Insulated divider for line ups
- Plexiglas divider for line ups
- Stainless steel, laminated or paint
- Product stops on shelving
- Digital thermometer

IMPORTANT NOTE:

ALL REFRIGERATED CASES ARE DESIGNED TO OPERATE IN AN ENVIRONMENT OF 75 DEGREES AND 55% RELATIVE HUMIDITY.

PRODUCT MUST BE COOLED BEFORE BEING DISPLAYED WITHIN THE CASE.

DRAIN IS REQUIRED

OPEN MERCHANDISERS – STRAIGHT SIDES 35E SERIES – 82.25"H – ENDLESS DESIGN – DAIRY


TECHNICAL DATA

MODEL NO.	SC R	SC-OD35E-3-LED-LC R-OD35E-3-LED-LC	SC-OD35E-4-LED-LC R-OD35E-4-LED-LC	SC-OD35E-5-LED-LC R-OD35E-5-LED-LC	SC-OD35E-6-LED-LC R-OD35E-6-LED-LC
Length with (2) ends		39"	51"	63"	75"
Length without ends		36"	48"	60"	72"
Height with ends		82.25"	82.25"	82.25"	82.25"
Height without ends		82"	82"	82"	82"
Depth with ends		34.5"	34.5"	34.5"	34.5"
Depth without ends		34"	34"	34"	34"
Endless design (Dimensions are +/- 1/4")		YES	YES	YES	YES
Operating temperature		36°F to 40°F	36°F to 40°F	36°F to 40°F	36°F to 40°F
Compressor size HP	SC	1/2	3/4	1	1
BTU's at +20°F Evap. Temp.	R	4906	6542	8176o	9813
Voltage	SC	115	115	115	115
Amperage	SC	16.0	13.0	16.0	16.0
Remote Voltage	R	115	115 / 208-230	115 / 208-230	115 / 208-230
Amperage, lights only	R	2.0	3.0	4.0	4.0
Cord and plug	SC R	5-15P N/A	L14-20P N/A	L14-20P N/A	L14-20P N/A
Exterior color		W, B, S	W, B, S	W, B, S	W, B, S
Interior color		W, B, S	W, B, S	W, B, S	W, B, S
# of rows / shelves		4/4	4/4	W, B, S	4/8
Shelf Size		(4) 18"	(4) 18"	(4) 18"	(8) 18"
Shipping Info					
Height		86"	86"	86"	86"
Depth		44"	44"	44"	44"
Length		61"	61"	61"	86"
Gross weight (SC/R)		710/Call for Info	975/Call for Info	1185/Call for Info	1185/Call for Info
Cubic feet		100	100	Call for Info	142

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Cases are equipped with drains; check your local building codes for connection requirements.
- Specification subject to change without notice


OPEN MERCHANDISERS – STRAIGHT SIDES 35E SERIES – 82.25"H – ENDLESS DESIGN – DAIRY

DRAWINGS • FRONT VIEW • SIDE VIEW • PLAN VIEWS

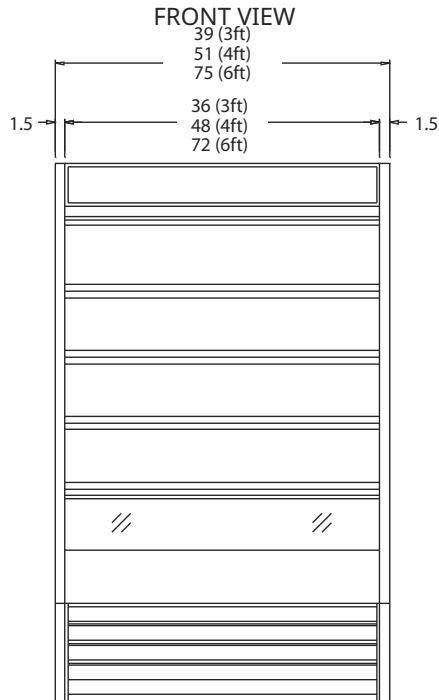

Cabinet Overall Dimensions

Height - 82
Depth - 34.5
Length - 3ft, 4ft, 6ft
4 - 18" shelves
Removeable rear spacer
for air venting
Lighted Canopy - Display
Front Grille Straight
Standard Bench Assembly

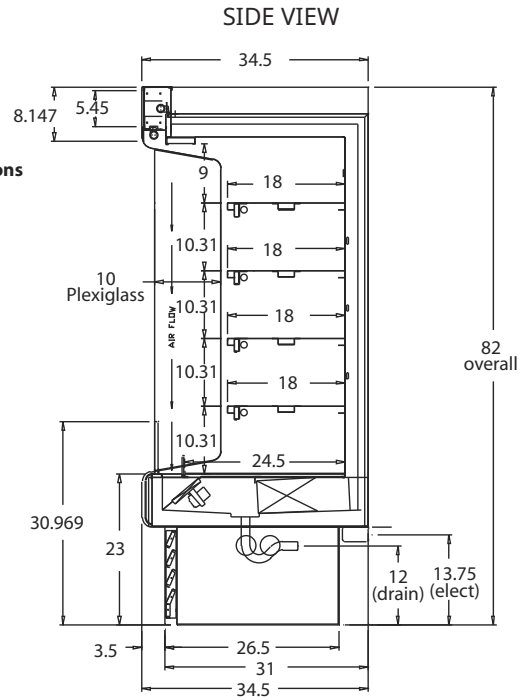

FLOOR PLAN VIEWS

