

## OPEN MERCHANDISERS

### 35E SERIES – SLOPED – 78.5"H – ENDLESS DESIGN - MEAT



| MODEL NO.       | DESCRIPTION    | LENGTH | DEPTH | HEIGHT | VOLTAGE     | AMPS | HP/BTUS | POWER CORD | EST. SHIP WEIGHT |
|-----------------|----------------|--------|-------|--------|-------------|------|---------|------------|------------------|
| SC-OM35E-3S-LED | Self Contained | 39"    | 34.5" | 78.5"  | 115         | 16.0 | 1/2     | 5-20P      | 700              |
| SC-OM35E-4S-LED | Self Contained | 51"    | 34.5" | 78.5"  | 115/208-230 | 13.0 | 3/4     | L14-20P    | 965              |
| SC-OM35E-5S-LED | Self Contained | 63"    | 34.5" | 78.5"  | 115/208-230 | 16.0 | 1       | L14-20P    | 1070             |
| SC-OM35E-6S-LED | Self Contained | 75"    | 34.5" | 78.5"  | 115/208-230 | 16.0 | 1       | L14-20P    | 1175             |
| R-OM35E-3S-LED  | Remote         | 39"    | 34.5" | 78.5"  | 115         | 2.0  | 4906    | No         | 575              |
| R-OM35E-4S-LED  | Remote         | 51"    | 34.5" | 78.5"  | 115         | 3.0  | 6542    | No         | 790              |
| R-OM35E-5S-LED  | Remote         | 63"    | 34.5" | 78.5"  | 115         | 4.0  | 8176    | No         | 895              |
| R-OM35E-6S-LED  | Remote         | 75"    | 34.5" | 78.5"  | 115         | 4.0  | 9813    | No         | 1000             |
| R-OM35E-8S-LED  | Remote         | 99"    | 36.5" | 78.5"  | 115         | 6.0  | 13084   | No         | 1580             |
| R-OM35E-10S-LED | Remote         | 123"   | 36.5" | 78.5"  | 115         | 7.0  | 16355   | No         | 1790             |
| R-OM35E-12S-LED | Remote         | 147"   | 36.5" | 78.5"  | 115         | 8.0  | 19626   | No         | 2000             |

**(ALL WHITE OR ALL BLACK, NO EXTRA CHARGE—IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY)**

#### Prefix

SC = Self Contained  
R = Remote

#### Suffix

B = Black  
W = White  
S = Stainless Steel  
LED = LED lighting

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Cases are equipped with drains; check your local building codes for connection requirements.
- Specification subject to change without notice



Howard McCray • 831 East Cayuga St • Philadelphia, PA 19124 USA • (215) 464-6800

1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com

## OPEN MERCHANDISERS

## 35E SERIES – SLOPED – 78.5"H – ENDLESS DESIGN - MEAT

### STANDARD SPECIFICATIONS AND OPTIONAL FEATURES

#### CONSTRUCTION

- UL Classified to ANSI/NSF 7
- Foamed in place CFC free foam
- Heavy gauge steel super structure
- Multi deck
- Endless design allows for continuous line up

#### INTERIOR

- White, black, or stainless steel end panels
- Removable white, black, or stainless steel floor pans
- White, black, or stainless steel perforated rear wall (for even air distribution)
- Full length lighting at top of unit
- 4 levels of lighted shelving
- 5 levels of product display
- Stylish price tag molding on each shelf
- 3" Product stop on each shelf

#### EXTERIOR

- White, black, or stainless steel ends and front
- Removeable front grill allows for cleaning and servicing
- 1" bumper
- Choice of end panels

#### FINISHES

- White, black, or stainless steel front rail
- White, black, or stainless steel end trim
- Laminate, and custom paints available
- Coated galvanized rear
- White, black, or stainless steel end panels
- White, black, or stainless steel rear panels

#### IMPORTANT NOTE:

**ALL REFRIGERATED CASES ARE DESIGNED TO OPERATE IN AN ENVIRONMENT OF 75 DEGREES AND 55% RELATIVE HUMIDITY.**

**PRODUCT MUST BE COOLED BEFORE BEING DISPLAYED WITHIN THE CASE.**

**DRAIN IS REQUIRED**

#### LIGHTING

- 1 row at inside top of unit
- 4 rows of lighted shelving

#### ELECTRICAL REQUIREMENTS


- Self contained unit comes with cord and plug
- UL/CUL listed
- See Tech page for details on voltage

#### REFRIGERATION

- Low velocity fans located below deck area (to insure even flow of air)
- Electronic Control System with automatic air defrost to maintain balanced temperatures
- New high efficiency air screen technology
- Self contained system
- Copeland hermetic unit
- Remotes available

#### OPTIONAL FEATURES

- Solid state lighting
- Night covers
- Security cover
- Peg bars
- Insulated divider for line ups
- Plexiglas divider for line ups
- Stainless steel, laminated or paint
- 3 different end panel choices
- Digital thermometer

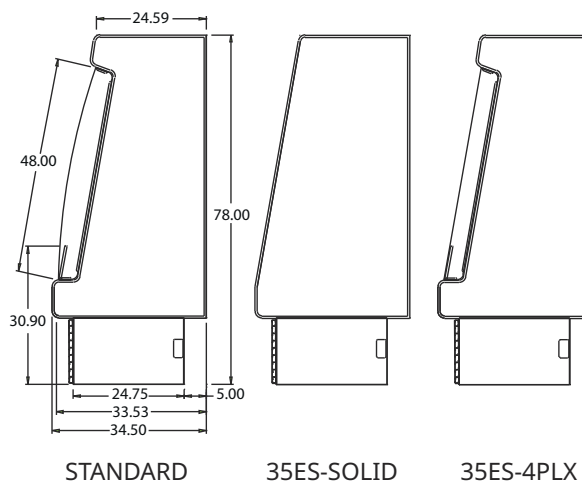

## OPEN MERCHANDISERS 35E SERIES – SLOPED – 78.5"H – ENDLESS DESIGN - MEAT

### TECHNICAL DATA

| MODEL NO.                  | SC<br>R     | SC-OM35E-3S-LED<br>R-OM35E-3S-LED | SC-OM35E-4S-LED<br>R-OM35E-4S-LED | SC-OM35E-5S-LED<br>R-OM35E-5S-LED | SC-OM35E-6S-LED<br>R-OM35E-6S-LED | R-OM35E-8S-LED              | R-OM35E-10S-LED             | R-OM35E-12S-LED             |
|----------------------------|-------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------|-----------------------------|-----------------------------|
| Length with (2) ends       |             | 39"                               | 51"                               | 63"                               | 75"                               | 99"                         | 123"                        | 147"                        |
| Length without ends        |             | 36"                               | 48"                               | 60"                               | 72"                               | 96"                         | 120"                        | 144"                        |
| Height with ends           |             | 78.5"                             | 78.5"                             | 78.5"                             | 78.5"                             | 78.5"                       | 78.5"                       | 78.5"                       |
| Height without ends        |             | 78"                               | 78"                               | 78"                               | 78"                               | 79.5"                       | 79.5"                       | 79.5"                       |
| Depth with ends            |             | 34.5"                             | 34.5"                             | 34.5"                             | 34.5"                             | 35.25"                      | 35.25"                      | 35.25"                      |
| Depth without ends         |             | 34"                               | 34"                               | 34"                               | 34"                               | 35.25"                      | 35.25"                      | 35.25"                      |
| Endless design             |             | YES                               | YES                               | YES                               | YES                               | YES                         | YES                         | YES                         |
| (Dimensions are +/- 1/4")  |             |                                   |                                   |                                   |                                   |                             |                             |                             |
| Operating temperature      |             | 34°F to 38°F                      | 34°F to 38°F                      | 34°F to 38°F                      | 34°F to 38°F                      | 34°F to 38°F                | 34°F to 38°F                | 34°F to 38°F                |
| Compressor size HP         | SC          | 1/2                               | 3/4                               | 1                                 | 1                                 | N/A                         | N/A                         | N/A                         |
| Defrost per day (24 hours) | Air Defrost | 6 per day.                        | 6 per day.                        | 6 per day                         | 6 per day                         | 6 per day                   | 6 per day                   | 6 per day                   |
| BTU's at +20°F Evap. Temp. | R           | 4906                              | 6542                              | 8177                              | 9813                              | 13100                       | 16353                       | 19626                       |
| Voltage                    | SC          | 115                               | 115/208-230                       | 115/208-230                       | 115/208-230                       |                             |                             |                             |
| Amperage                   | SC          | 16.0                              | 13.0                              | 16.0                              | 16.0                              |                             |                             |                             |
| Remote Voltage             | R           | 115                               | 115                               | 115                               | 115                               | 115                         | 115                         | 115                         |
| Amperage, lights only      | R           | 2.0                               | 3.0                               | 4.0                               | 4.0                               | 6.0                         | 7.0                         | 8.0                         |
| Cord and plug              | SC          | 5-20P                             | L14-20P                           | L14-20P                           | L14-20P                           |                             |                             |                             |
|                            | R           | NO                                | NO                                | NO                                | NO                                | NO                          | NO                          | NO                          |
| Exterior color             |             | W, B, S                           | W, B, S                           | W, B, S                           | W, B, S                           | W, B, S                     | W, B, S                     | W, B, S                     |
| Interior color             |             | W, B, S                           | W, B, S                           | W, B, S                           | W, B, S                           | W, B, S                     | W, B, S                     | W, B, S                     |
| # of rows / shelves        |             | 4/4                               | 4/4                               | 4/4                               | 4/8                               | 4/8                         | 4/12                        | 4/12                        |
| Shelf Size                 |             | (1) 14", (1) 16"<br>(2) 18"       | (1) 14", (1) 16"<br>(2) 18"       | (1) 14", (1) 16"<br>(2) 18"       | (2) 14", (2) 16"<br>(4) 18"       | (2) 14", (2) 16"<br>(4) 18" | (3) 14", (3) 16"<br>(6) 18" | (4) 14", (4) 16"<br>(8) 18" |
| Shipping Info              |             |                                   |                                   |                                   |                                   |                             |                             |                             |
| Height                     |             | 86"                               | 86"                               | 86"                               | 86"                               | 86"                         | 86"                         | 86"                         |
| Depth                      |             | 44"                               | 44"                               | 44"                               | 44"                               | 44"                         | 44"                         | 44"                         |
| Length                     |             | 61"                               | 61"                               | 72"                               | 86"                               | 109                         | 135                         | 157                         |
| Gross weight (SC/R)        |             | 700/575                           | 965/790                           | 1070/895                          | 1175/1000                         | 1580                        | 1790                        | 2000                        |
| Cubic feet                 |             | 100                               | 130                               | Call for Info                     | 184                               | 233                         | 288                         | 336                         |


- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Cases are equipped with drains; check your local building codes for connection requirements.
- Specification subject to change without notice

## OPEN MERCHANDISERS

## 35E SERIES – SLOPED – 78.5"H – ENDLESS DESIGN - MEAT


### DRAWINGS • SIDE VIEW • PLAN VIEWS

SIDE VIEW

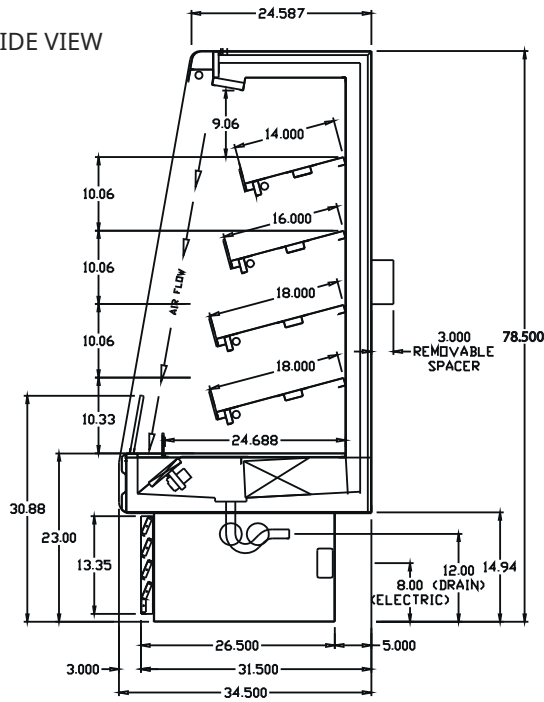


FLOOR PLAN VIEWS


8' PLAN VIEW

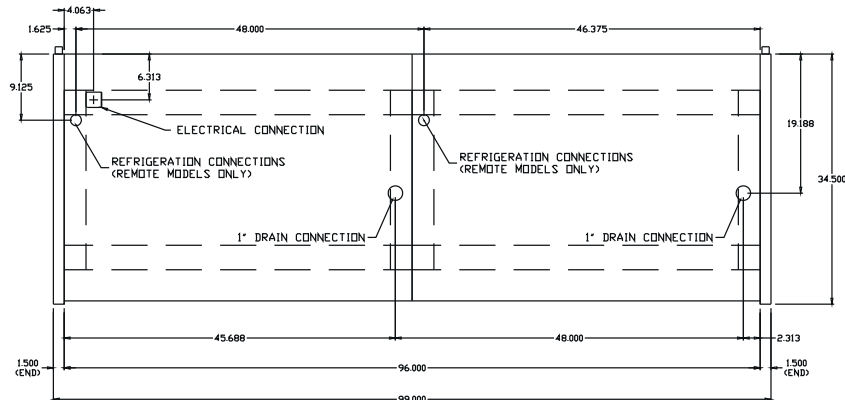


3' & 4' PLAN VIEWS

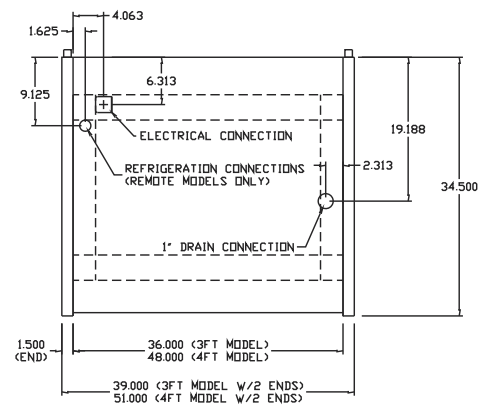

10' PLAN VIEW

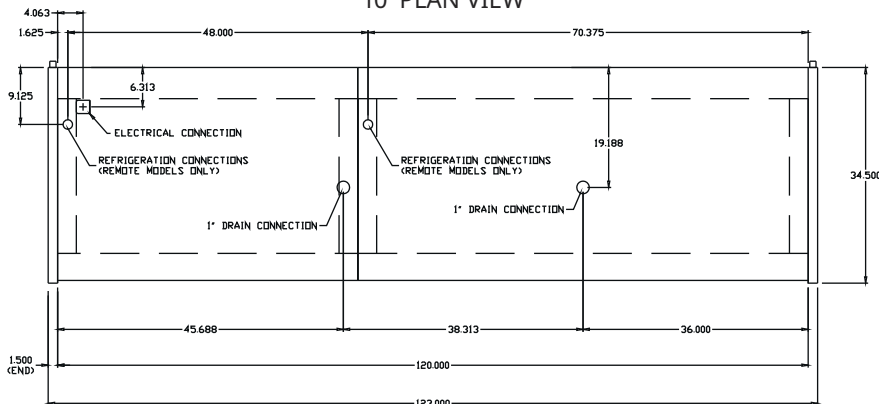

12' PLAN VIEW

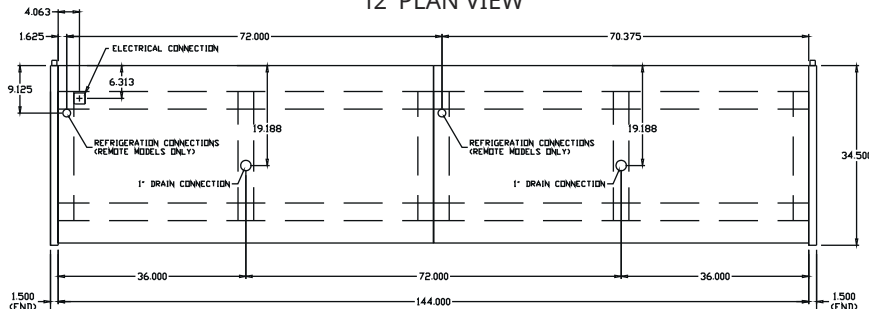

5' & 6' PLAN VIEWS

