



MODEL

1832




H-version

SIZE

18" WIDE CONVEYOR
32" LONG BAKE CHAMBER

TYPE

GAS & ELECTRIC

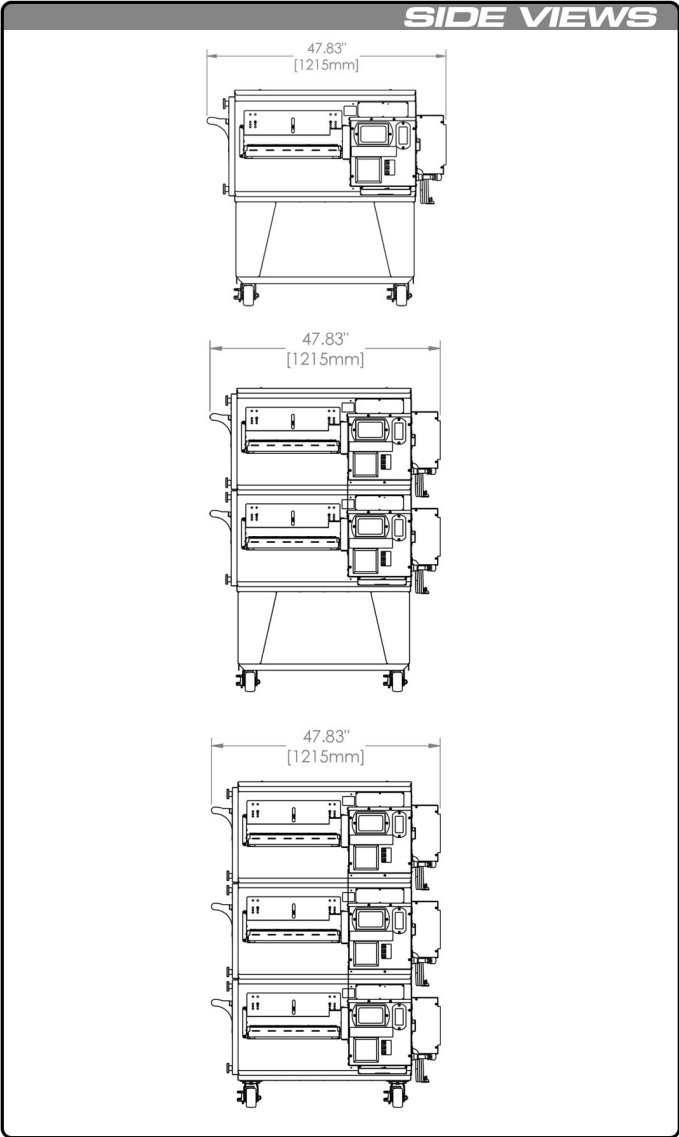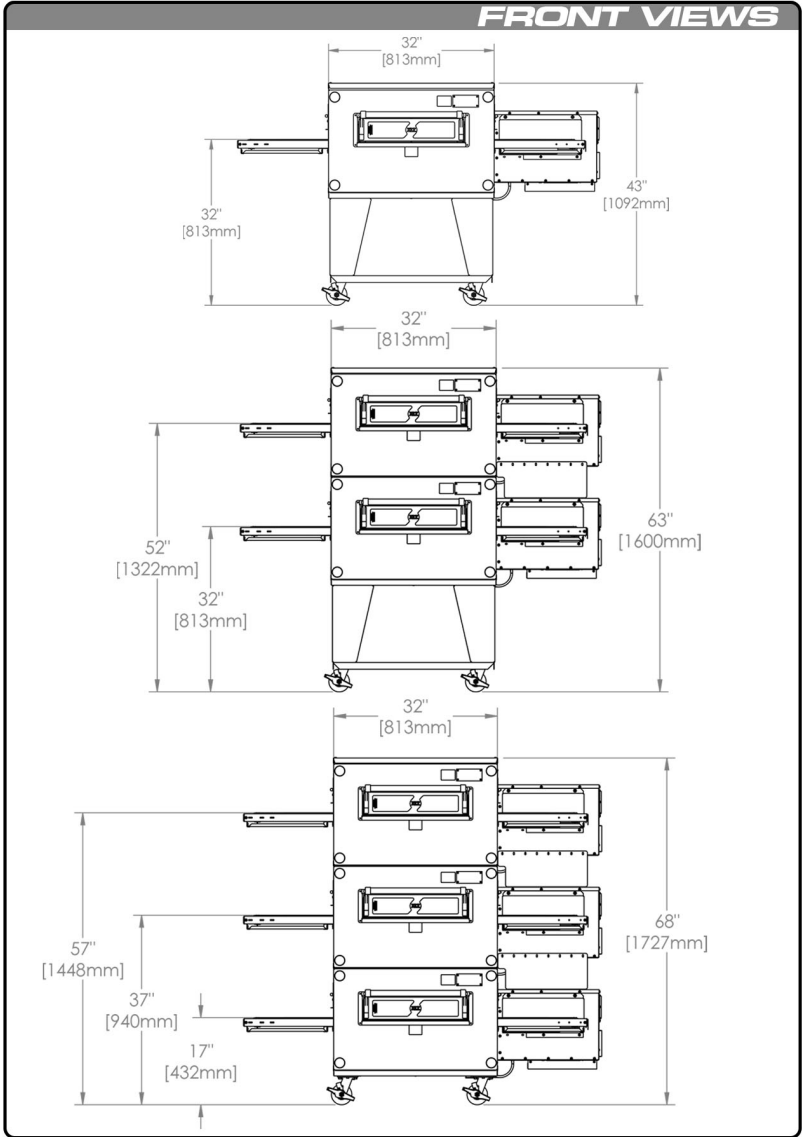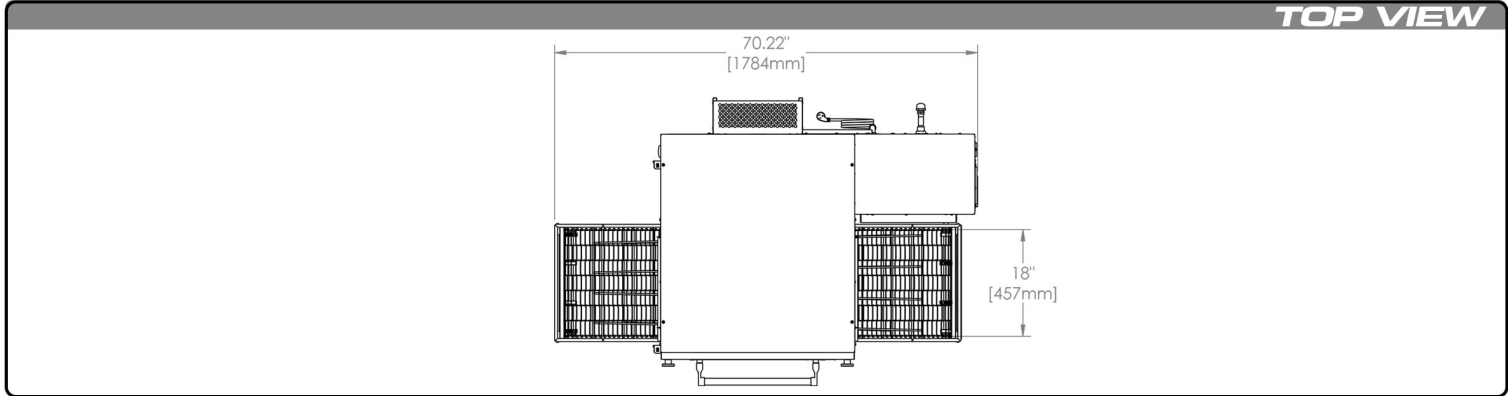

1832**H-version****DATA SHEET****1832H GAS OVEN**

Heating Value						
Standard	World					
	Natural		Propane		Butane	
56,000 BTU/Hr	16.41 Kw/Hr		16.41 Kw/Hr		18.50 Kw/Hr	
	59.08 Mj/Hr		59.08 Mj/Hr			
Electrical Requirement						
Standard			World			
120 VAC, 4.8 Amps, 50/60 Hz			220/230/240 VAC Option, 3 Amps, 50/60 Hz			
Inlet Pressure Range						
	W/C	mbar	kPa		kPa (Korea)	
Natural Gas	6-14	15-35	1.50 - 3.50		1.50 - 2.50	
Propane Gas	11-14	27.5 - 35	2.75 - 3.50		2.30 - 3.30	
Manifold Pressure Range						
	W/C		mbar		kPa	
Natural Gas	3.5		8.75		0.875	
Propane Gas	10		25		2.50	
Oven Weight	Single (1 crate)		Double (2 crates)		Triple (3 crates)	
Oven Only	lbs	kg	lbs	kg	lbs	kg
	569	258	1034	469	1343	609

1832H ELECTRIC OVEN

<i>Electrical Requirement</i>					
	Standard			World	
VAC	208/240 VAC			380/415 VAC	
Amps	45/39 Amps			31/24 Amps	
Hz	60 Hz			50 Hz	
Wire Service	4 Wire Service - L1, L2, L3 +1 Ground (per oven)			5 Wire Service - L1, L2, L3 N+2 Grounds (per oven)	
Phase	3 Phase			3 Phase	
Kw	16 Kw			16/15 Kw	
<i>Oven Weight</i>	<i>Single (1 crate)</i>		<i>Double (2 crates)</i>		<i>Triple (3 crates)</i>
Oven Only	lbs	kg	lbs	kg	lbs
	568	258	1030	467	1457

OVEN & HOOD WARRANTY

<i>USA & Canada (Parts & Labor)</i>	<i>International (Parts & Labor)</i>
10 Years Oven & Hood Combo Purchase*	7 Years Oven & Hood Combo Purchase
7 Years Standard	5 Years Standard

*Pre-piped ANSUL system must be purchased on each oven and hood






MODEL
1832
H-version


SIZE
18" WIDE CONVEYOR
32" LONG BAKE CHAMBER

TYPE
GAS & ELECTRIC


TOP VIEW

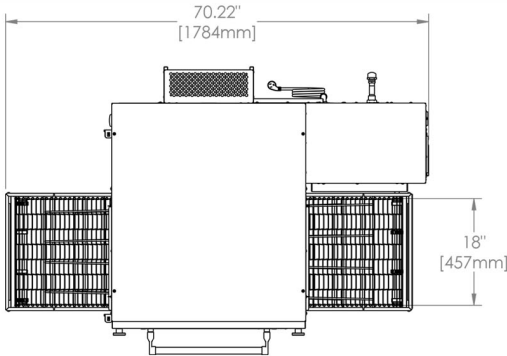

FRONT VIEWS

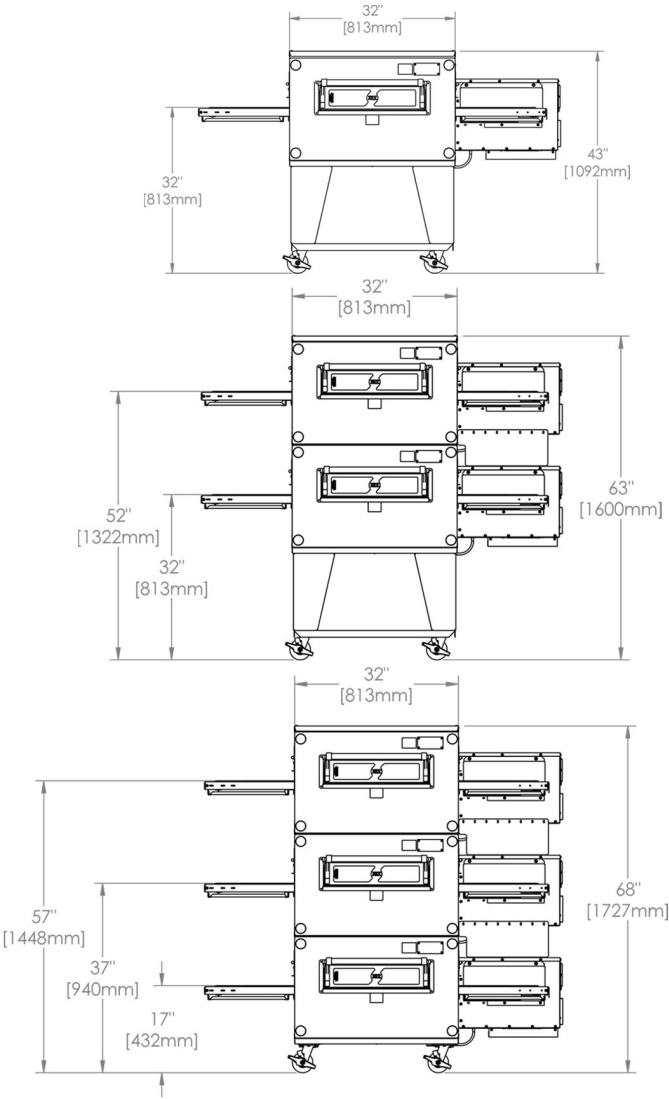

SIDE VIEWS

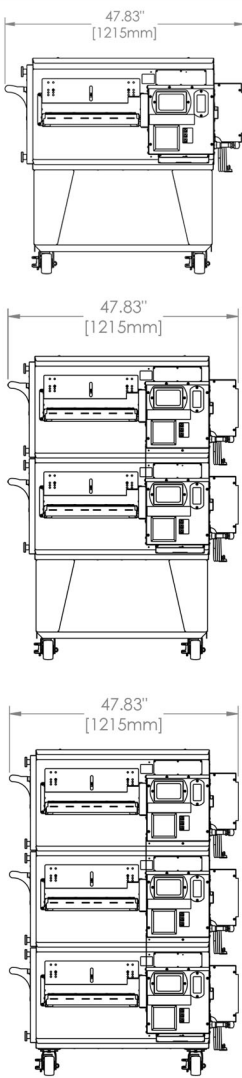

1832**H-version**

DATA SHEET

1832H GAS OVEN

Heating Value							
Standard	World						
	Natural		Propane		Butane		
56,000 BTU/Hr	16.41 Kw/Hr		16.41 Kw/Hr		18.50 Kw/Hr		
	59.08 Mj/Hr		59.08 Mj/Hr				
Electrical Requirement							
Standard			World				
120 VAC, 4.8 Amps, 50/60 Hz			220/230/240 VAC Option, 3 Amps, 50/60 Hz				
Inlet Pressure Range							
	W/C	mbar	kPa		kPa (Korea)		
Natural Gas	6-14	15-35	1.50 - 3.50		1.50 - 2.50		
Propane Gas	11-14	27.5 - 35	2.75 - 3.50		2.30 - 3.30		
Manifold Pressure Range							
	W/C		mbar		kPa		
Natural Gas	3.5		8.75		0.875		
Propane Gas	10		25		2.50		
Oven Weight		Single (1 crate)		Double (2 crates)		Triple (3 crates)	
Oven Only	lbs	kg	lbs	kg	lbs	kg	
	569	258	1034	469	1343	609	

1832H ELECTRIC OVEN

Electrical Requirement						
	Standard			World		
VAC	208/240 VAC			380/415 VAC		
Amps	45/39 Amps			31/24 Amps		
Hz	60 Hz			50 Hz		
Wire Service	4 Wire Service - L1, L2, L3 +1 Ground (per oven)			5 Wire Service - L1, L2, L3 N+2 Grounds (per oven)		
Phase	3 Phase			3 Phase		
Kw	16 Kw			16/15 Kw		
Oven Weight	Single (1 crate)		Double (2 crates)		Triple (3 crates)	
Oven Only	lbs	kg	lbs	kg	lbs	kg
	568	258	1030	467	1457	661

OVEN & HOOD WARRANTY

USA & Canada (Parts & Labor)	International (Parts & Labor)
10 Years Oven & Hood Combo Purchase*	7 Years Oven & Hood Combo Purchase
7 Years Standard	5 Years Standard


*Pre-piped ANSUL system must be purchased on each oven and hood






MODEL	
1832	H-version
SIZE	
18" WIDE CONVEYOR 32" LONG BAKE CHAMBER	
TYPE	
GAS & ELECTRIC	


TOP VIEW

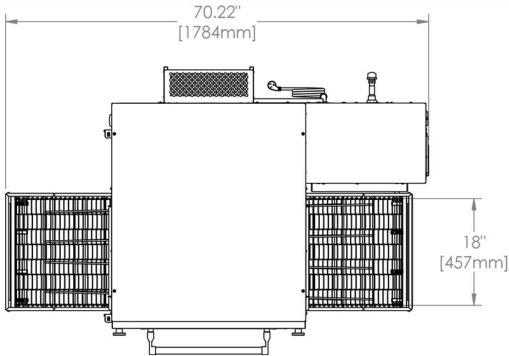

FRONT VIEWS

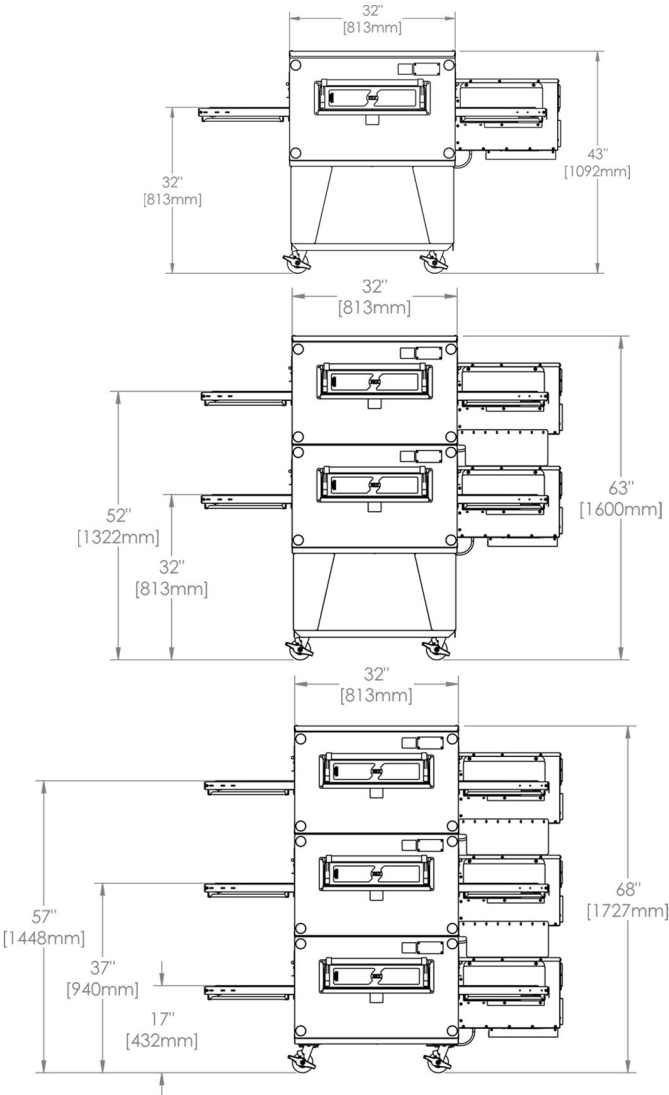

SIDE VIEWS

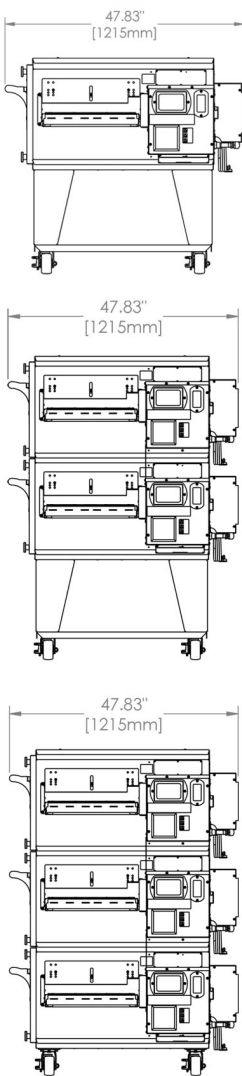

1832**H-version**

DATA SHEET

1832H GAS OVEN

Heating Value							
Standard	World						
	Natural		Propane		Butane		
	16.41 Kw/Hr		16.41 Kw/Hr		18.50 Kw/Hr		
56,000 BTU/Hr	59.08 Mj/Hr		59.08 Mj/Hr				
Electrical Requirement							
Standard			World				
120 VAC, 4.8 Amps, 50/60 Hz			220/230/240 VAC Option, 3 Amps, 50/60 Hz				
Inlet Pressure Range							
	W/C	mbar	kPa		kPa (Korea)		
Natural Gas	6-14	15-35	1.50 - 3.50		1.50 - 2.50		
Propane Gas	11-14	27.5 - 35	2.75 - 3.50		2.30 - 3.30		
Manifold Pressure Range							
	W/C		mbar		kPa		
Natural Gas	3.5		8.75		0.875		
Propane Gas	10		25		2.50		
Oven Weight		Single (1 crate)		Double (2 crates)		Triple (3 crates)	
Oven Only	lbs	kg	lbs	kg	lbs	kg	
	569	258	1034	469	1343	609	

1832H ELECTRIC OVEN

Electrical Requirement						
	Standard			World		
VAC	208/240 VAC			380/415 VAC		
Amps	45/39 Amps			31/24 Amps		
Hz	60 Hz			50 Hz		
Wire Service	4 Wire Service - L1, L2, L3 +1 Ground (per oven)			5 Wire Service - L1, L2, L3 N+2 Grounds (per oven)		
Phase	3 Phase			3 Phase		
Kw	16 Kw			16/15 Kw		
Oven Weight	Single (1 crate)		Double (2 crates)		Triple (3 crates)	
Oven Only	lbs	kg	lbs	kg	lbs	kg
	568	258	1030	467	1457	661

OVEN & HOOD WARRANTY

USA & Canada (Parts & Labor)	International (Parts & Labor)
10 Years Oven & Hood Combo Purchase*	7 Years Oven & Hood Combo Purchase
7 Years Standard	5 Years Standard

*Pre-piped ANSUL system must be purchased on each oven and hood

