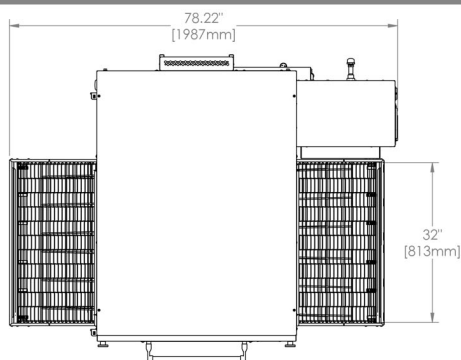
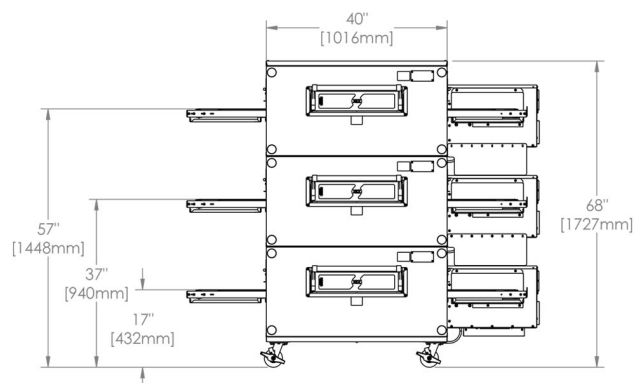
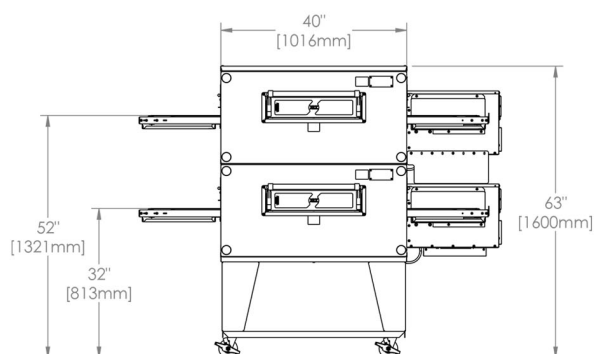
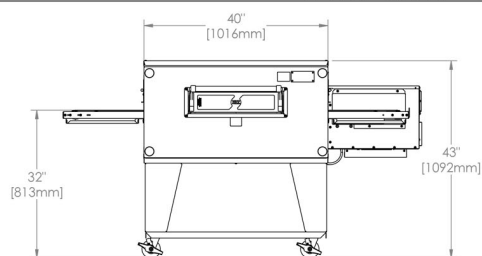
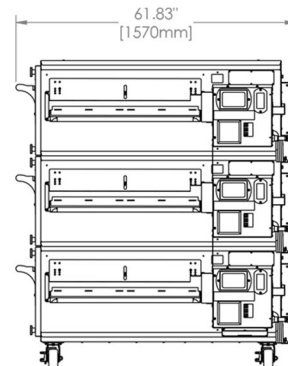




**3240****MODEL****H-version****SIZE****32" WIDE CONVEYOR
40" LONG BAKE CHAMBER****TYPE****GAS & ELECTRIC****TOP VIEW****FRONT VIEWS****SIDE VIEWS**

3240**H-version****XLT**
SmartSolutions™**DATA SHEET**
3240H GAS OVEN

Heating Value							
Standard	World						
	Natural		Propane		Butane		
125,000 BTU/Hr	36.60 Kw/Hr		36.60 Kw/Hr		39.50 Kw/Hr		
	131.88 MJ/Hr		131.88 MJ/Hr				
Electrical Requirement							
Standard			World				
120 VAC, 4.8 Amps, 50/60 Hz			220/230/240 VAC Option, 3 Amps, 50/60 Hz				
Inlet Pressure Range							
	W/C	mbar	kPa		kPa (Korea)		
Natural Gas	6-14	15-35	1.50 - 3.50		1.50 - 2.50		
Propane Gas	11 - 14	27.5 - 35	2.75 - 3.50		2.30 - 3.30		
Manifold Pressure Range							
	W/C		mbar		kPa		
Natural Gas	3.5		8.75		0.875		
Propane Gas	10		25		2.50		
Oven Weight		Single (1 crate)		Double (2 crates)		Triple (3 crates)	
Oven Only	lbs	kg	lbs	kg	lbs	kg	
	817	371	1483	673	2005	909	

3240H ELECTRIC OVEN








<i>Electrical Requirement</i>						
	Standard			World		
VAC	208/240 VAC			380/415 VAC		
Amps	82/65 Amps			51/44 Amps		
Hz	60 Hz			50 Hz		
Wire Service	4 Wire Service - L1, L2, L3 +1 Ground (per oven)			5 Wire Service - L1, L2, L3 N+2 Grounds (per oven)		
Phase	3 Phase			3 Phase		
Kw	27 Kw			27/31 Kw		
<i>Oven Weight</i>	<i>Single (1 crate)</i>		<i>Double (2 crates)</i>		<i>Triple (3 crates)</i>	
Oven Only	lbs	kg	lbs	kg	lbs	kg
	843	382	1533	695	2185	991

OVEN & HOOD WARRANTY

<i>USA & Canada (Parts & Labor)</i>	<i>International (Parts & Labor)</i>
10 Years Oven & Hood Combo Purchase*	7 Years Oven & Hood Combo Purchase
7 Years Standard	5 Years Standard

*Pre-piped ANSUL system must be purchased on each oven and hood

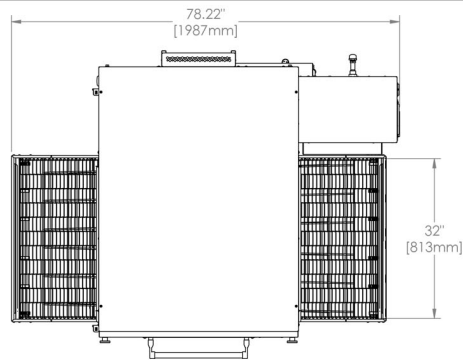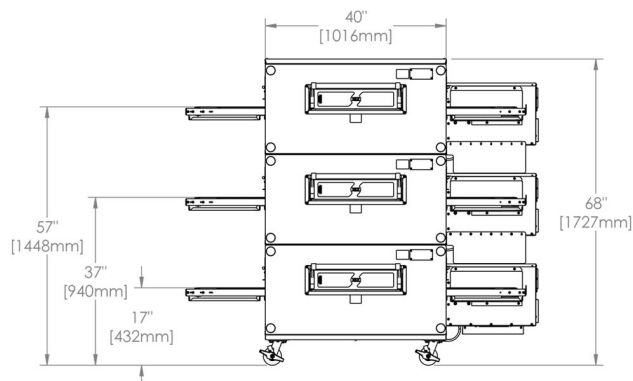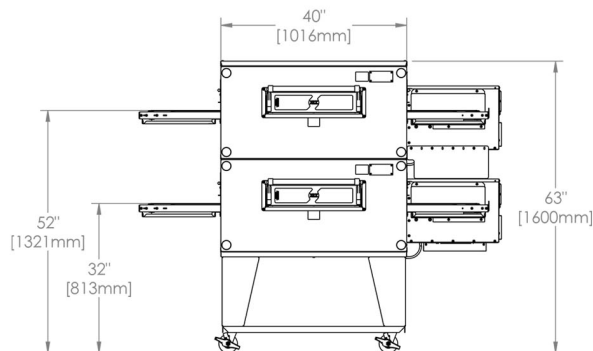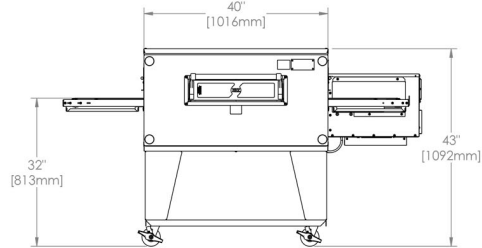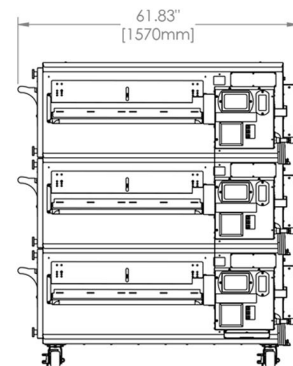

**3240****MODEL****H-version****SIZE****32" WIDE CONVEYOR
40" LONG BAKE CHAMBER****TYPE****GAS & ELECTRIC****TOP VIEW****FRONT VIEWS****SIDE VIEWS**

3240**H-version****XLT**
SmartSolutions™**DATA SHEET**
3240H GAS OVEN

Heating Value							
Standard	World						
	Natural		Propane		Butane		
	36.60 Kw/Hr		36.60 Kw/Hr		39.50 Kw/Hr		
125,000 BTU/Hr		131.88 Mj/Hr					
Electrical Requirement							
Standard			World				
120 VAC, 4.8 Amps, 50/60 Hz			220/230/240 VAC Option, 3 Amps, 50/60 Hz				
Inlet Pressure Range							
	W/C	mbar	kPa		kPa (Korea)		
Natural Gas	6-14	15-35	1.50 - 3.50		1.50 - 2.50		
Propane Gas	11 - 14	27.5 - 35	2.75 - 3.50		2.30 - 3.30		
Manifold Pressure Range							
	W/C		mbar		kPa		
Natural Gas	3.5		8.75		0.875		
Propane Gas	10		25		2.50		
Oven Weight		Single (1 crate)		Double (2 crates)		Triple (3 crates)	
Oven Only	lbs	kg	lbs	kg	lbs	kg	
	817	371	1483	673	2005	909	

3240H ELECTRIC OVEN








<i>Electrical Requirement</i>						
	Standard			World		
VAC	208/240 VAC			380/415 VAC		
Amps	82/65 Amps			51/44 Amps		
Hz	60 Hz			50 Hz		
Wire Service	4 Wire Service - L1, L2, L3 +1 Ground (per oven)			5 Wire Service - L1, L2, L3 N+2 Grounds (per oven)		
Phase	3 Phase			3 Phase		
Kw	27 Kw			27/31 Kw		
<i>Oven Weight</i>	<i>Single (1 crate)</i>		<i>Double (2 crates)</i>		<i>Triple (3 crates)</i>	
Oven Only	lbs	kg	lbs	kg	lbs	kg
	843	382	1533	695	2185	991

OVEN & HOOD WARRANTY

<i>USA & Canada (Parts & Labor)</i>	<i>International (Parts & Labor)</i>
10 Years Oven & Hood Combo Purchase*	7 Years Oven & Hood Combo Purchase
7 Years Standard	5 Years Standard

*Pre-piped ANSUL system must be purchased on each oven and hood

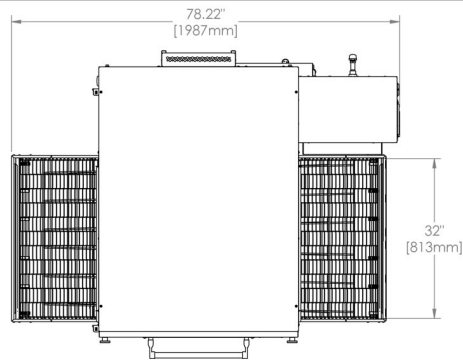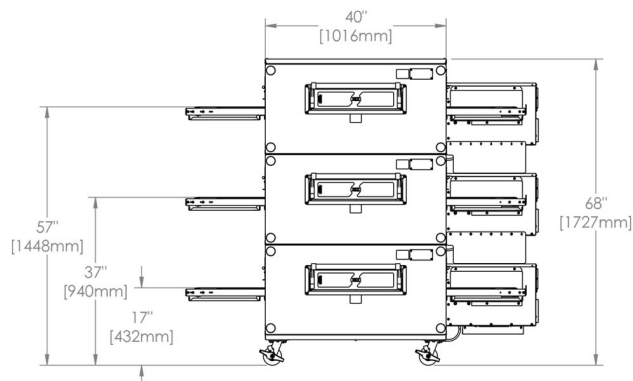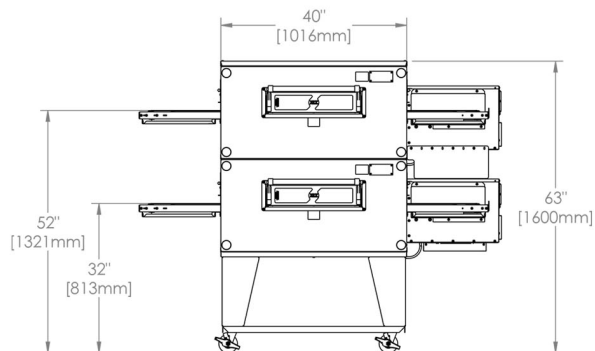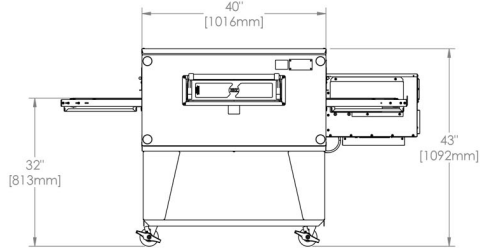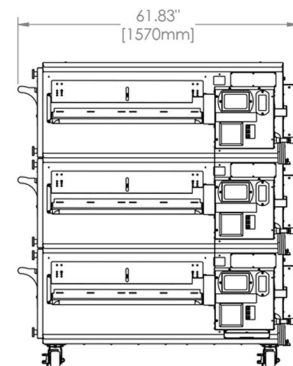

**3240****MODEL****H-version****SIZE****32" WIDE CONVEYOR
40" LONG BAKE CHAMBER****TYPE****GAS & ELECTRIC****TOP VIEW****FRONT VIEWS****SIDE VIEWS**

3240**H-version****XLT**
SmartSolutions™**DATA SHEET**
3240H GAS OVEN

Heating Value							
Standard	World						
	Natural		Propane		Butane		
125,000 BTU/Hr	36.60 Kw/Hr		36.60 Kw/Hr		39.50 Kw/Hr		
	131.88 MJ/Hr		131.88 MJ/Hr				
Electrical Requirement							
Standard			World				
120 VAC, 4.8 Amps, 50/60 Hz			220/230/240 VAC Option, 3 Amps, 50/60 Hz				
Inlet Pressure Range							
	W/C	mbar	kPa		kPa (Korea)		
Natural Gas	6-14	15-35	1.50 - 3.50		1.50 - 2.50		
Propane Gas	11 - 14	27.5 - 35	2.75 - 3.50		2.30 - 3.30		
Manifold Pressure Range							
	W/C		mbar		kPa		
Natural Gas	3.5		8.75		0.875		
Propane Gas	10		25		2.50		
Oven Weight		Single (1 crate)		Double (2 crates)		Triple (3 crates)	
Oven Only	lbs	kg	lbs	kg	lbs	kg	
	817	371	1483	673	2005	909	

3240H ELECTRIC OVEN

<i>Electrical Requirement</i>						
	Standard			World		
VAC	208/240 VAC			380/415 VAC		
Amps	82/65 Amps			51/44 Amps		
Hz	60 Hz			50 Hz		
Wire Service	4 Wire Service - L1, L2, L3 +1 Ground (per oven)			5 Wire Service - L1, L2, L3 N+2 Grounds (per oven)		
Phase	3 Phase			3 Phase		
Kw	27 Kw			27/31 Kw		
<i>Oven Weight</i>	<i>Single (1 crate)</i>		<i>Double (2 crates)</i>		<i>Triple (3 crates)</i>	
Oven Only	lbs	kg	lbs	kg	lbs	kg
	843	382	1533	695	2185	991

OVEN & HOOD WARRANTY

<i>USA & Canada (Parts & Labor)</i>	<i>International (Parts & Labor)</i>
10 Years Oven & Hood Combo Purchase*	7 Years Oven & Hood Combo Purchase
7 Years Standard	5 Years Standard

*Pre-piped ANSUL system must be purchased on each oven and hood

